REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.06.20	宋 辉

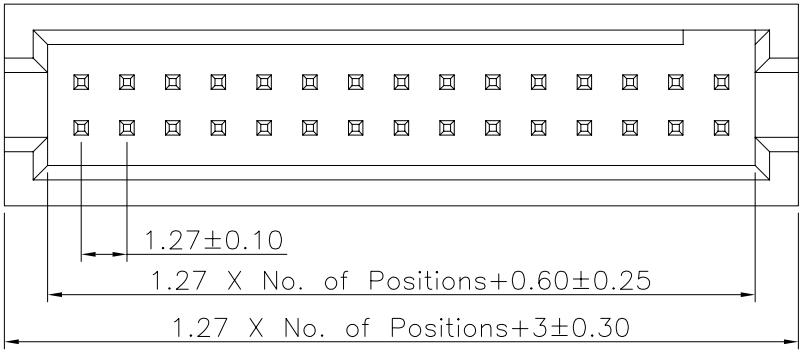

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V−0
Nylon 6T
All materials must be ROHS materials

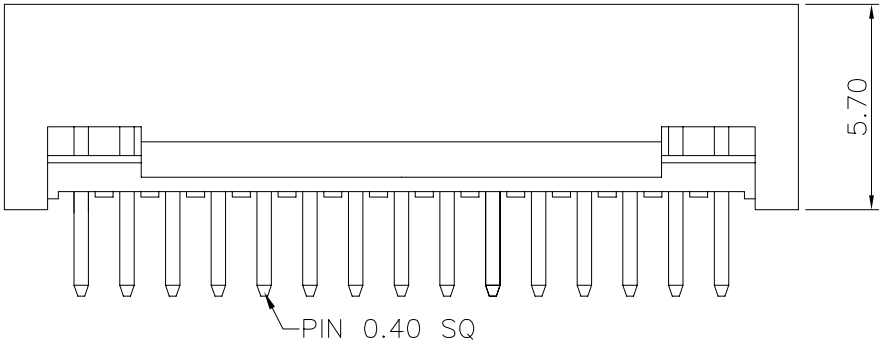

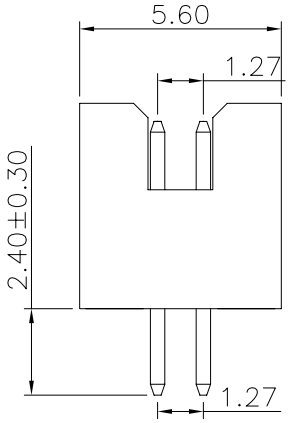

RECOMMENDED P.C.B LAYOUT

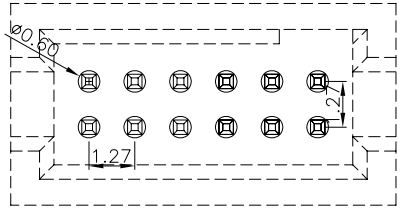

Ordering Information

BED201 −XX XX A 01

- No. of Pins per Row: 05~50
- Contact Plating: 01=Tin; 02=Gold Flash; Duplex plating 05=Gold Flash /Tin …
- A/无柱; B/有柱

深圳市硕康达科技有限公司 ShenZhenShi Sokconn Technology Co.,Ltd	GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2011.06.20	DWG. NO. BED201−A01	TITLE. 1.27 BOX HEADER DUAL ROW SMT TYPE BASE H5.70	
	X.° ± 5.0°	X. ± 0.30	CHECKED:	DATE:			
	.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	PART NO. BED201−XX XX A01		
	.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:			
	.XXX° ± 1.0°	.XXX ± 0.10					
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1				