




REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.06.20	宋 辉

Specifications


Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be ROHS materials

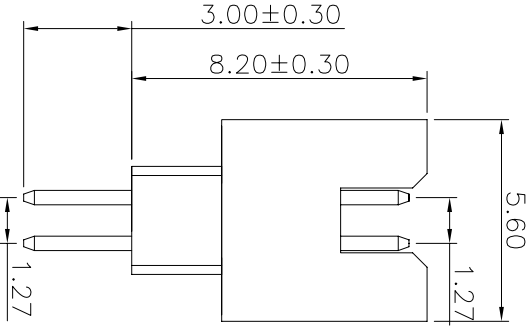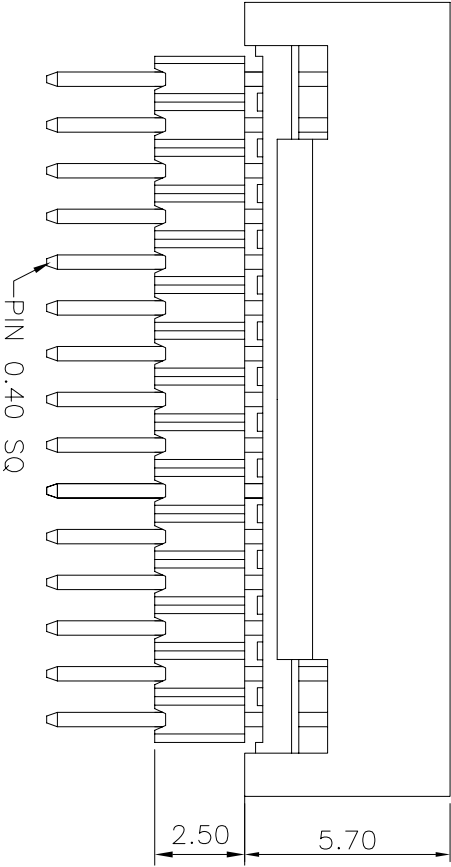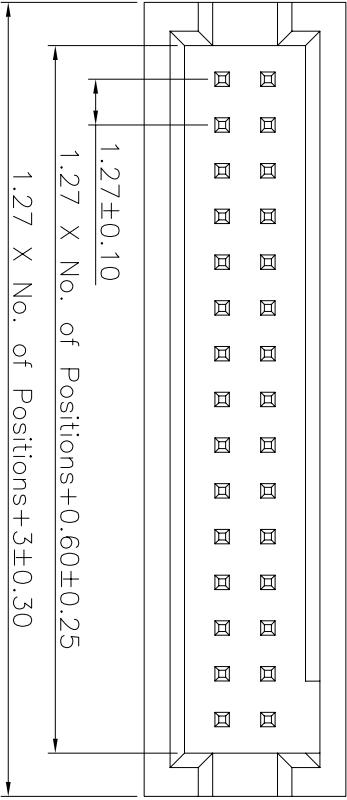

RECOMMENDED P.C.B LAYOUT

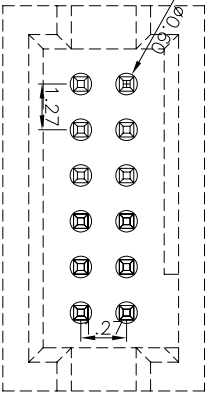

Ordering Information

BED202 -XX XX A 01
No. of Pins per Row Contact Plating A/无柱
05~50 01=Tin B/有柱
 Duplex plating
 05=Gold Flash /Tin
 ...



深圳市硕康达科技有限公司
ShenZhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2011.06.20

DWG. NO. BED202-A01

TITLE. 1.27 BOX HEADER

X* ± 5.0° X. ± 0.30

CHECKED:

DATE:

PART NO.

DUAL ROW SMT TYPE

X* ± 3.0° X ± 0.25

AUDITED:

DATE:

BED202-XX XX A01

BASE H8.20

.XX* ± 2.0° .XX ± 0.15

APPROVED:

DATE:

.XXX ± 1.0° .XXX ± 0.10