
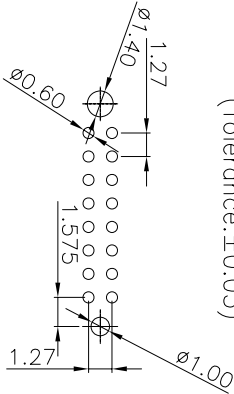
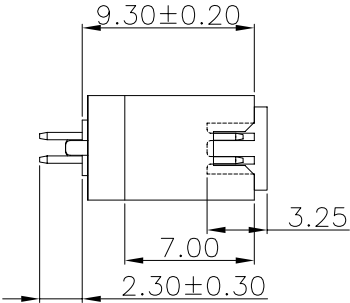
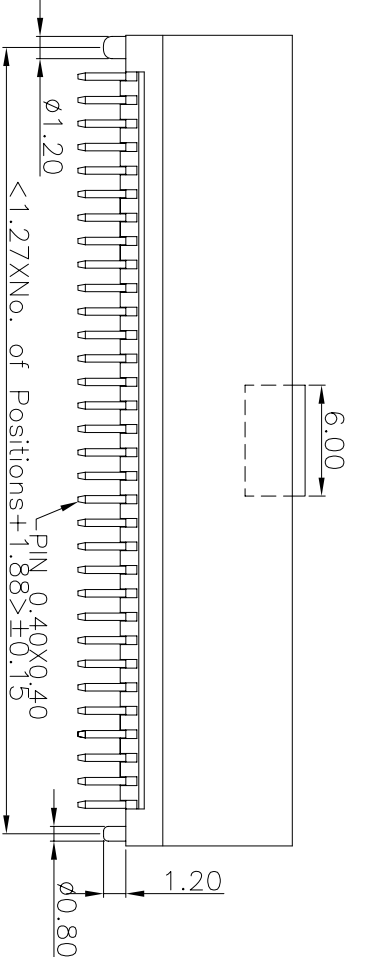



REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.02.17	李春桥

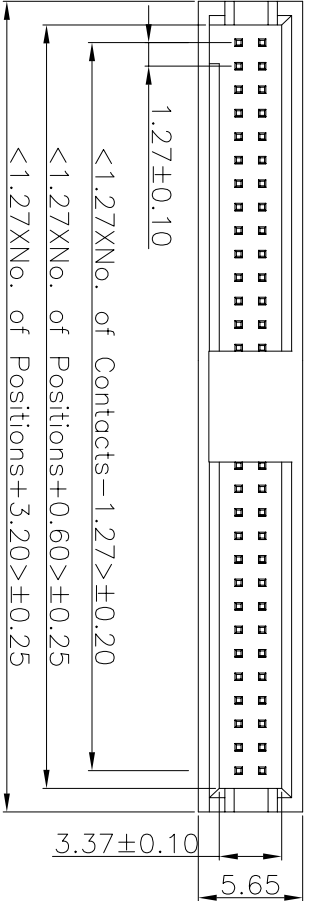

Recommended P.C.Board Layout
(Tolerance:±0.05)

Specifications
Current Rating:1Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding: 300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material: Brass
Insulator Material: Polyester, UL 94V-0
Nylon 6T/LCP
All materials must meet Greenconn
requirement for environment protection.

Ordering Information

BED209 -XX XX B 01-X
No. of Pins per Row Contact Plating A:with peg Options
05~50 01=Tin P=cup
02=Gold Flash B:without peg T=tape reel
Duplex plating PT=cup+reel
05=Gold Flash /Tin

 深圳市硕康达科技有限公司 ShenzhenShi Sokconn Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 李春桥		DWG. NO. BED209-B01		TITLE. 1.27 BOX HEADER DUAL ROW SMT TYPE BASE H9.00
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1		X. ± 5.0°	X. ± 0.30	DATE: 2014.02.17			
					.XX ± 3.0°	.X ± 0.25	CHECKED:		PART NO.	
					.XX ± 2.0°	.XX ± 0.15	AUDITED:		BED209-XX	
					.XXX ± 1.0°	.XXX ± 0.10	APPROVED:		XXB01-XX	
							DATE:			
							DATE:			
							DATE:			