
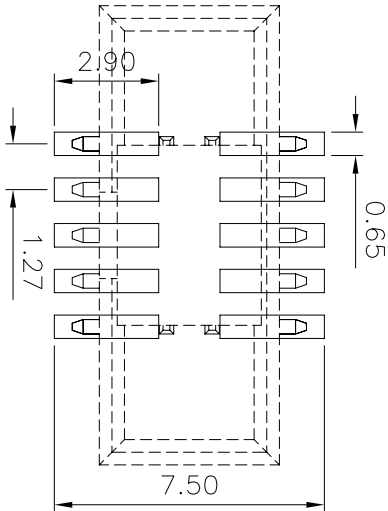


REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.04.24	李春桥

RECOMMENDED P.C.B LAYOUT

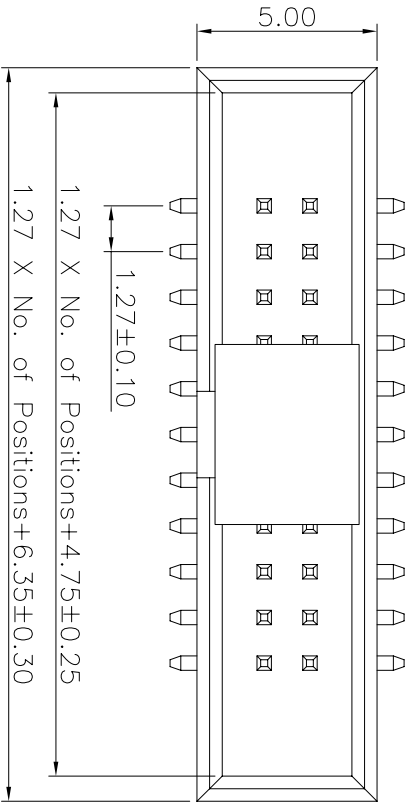


Specifications

Current Rating: 1amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials



Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T/LCP
All materials must be ROHS materials



Ordering Information

BES254 -XX XX A 01-XX

No. of Pins per Row Contact Plating A/无柱 Options
01=Tin B/有柱 P=cop
02=Gold Flash Duplex plating T=tape reel
05=Gold Flash /Tin PT=cop+reel
...

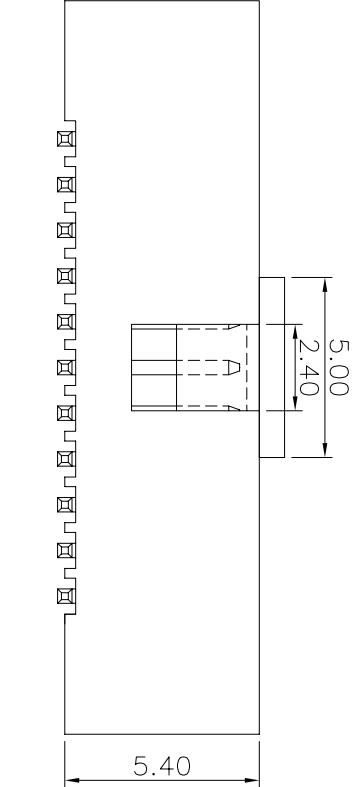

深圳市硕康达科技有限公司
Shenzhen Sokcorn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2014.04.24

DWG. NO.

BES254-A01

TITLE.

1.27 BOX HEADER
DUAL ROW SMT TYPE
BASE H5.40

X. ± 5.0° X. ± 0.30
X. ± 3.0° X. ± 0.25
XX ± 2.0° XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

PART NO.

BES254-XX XX A01-XX

AUDITED:

DATE:

APPROVED:

DATE:

REV.

01

UNIT.

mm

SCALE.

1:1

PAGE.

1/1



1

2

3

4

5

6

7

8

9