





REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.07.01	Chunqiao_Li

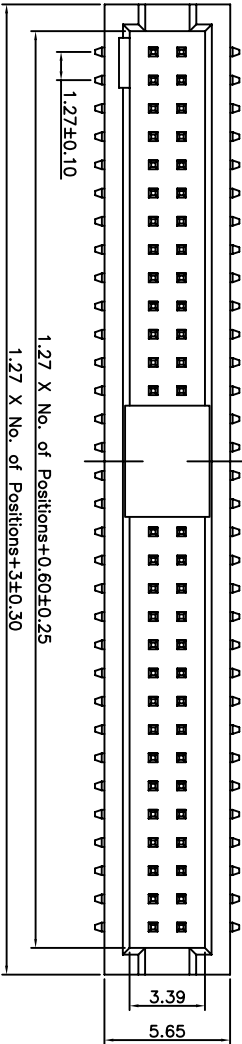

Specifications
Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 Nylon 6T
All materials must be ROHS materials

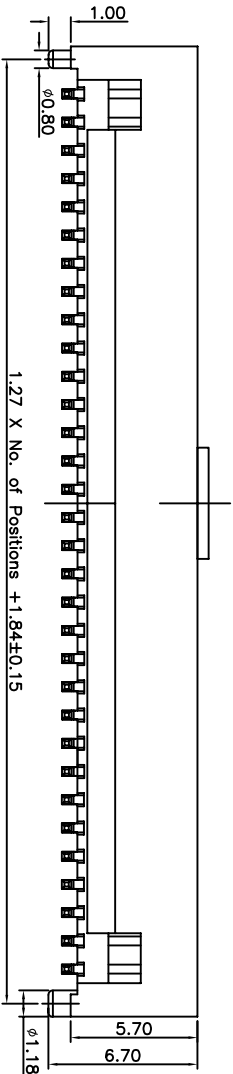

Ordering Information

BES257 -XX XX B 01-XX
No. of Pins per Row Contact Plating Options
05~50 01=Tin P=cap
02=Gold Flash T=tape reel
Duplex plating 05=Gold Flash /Tin PT=cap+reel
...

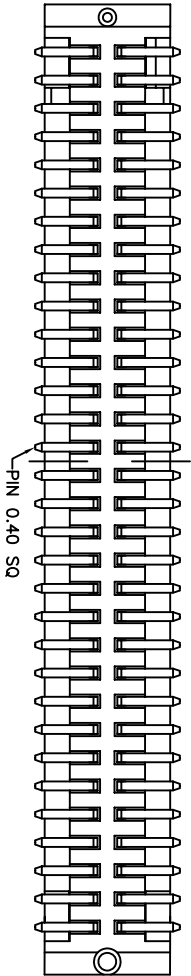

 深圳市硕康达科技有限公司 Shenzhen Shi Sokconn Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: Chunqiao_Li	DATE: 2014.07.01	DWG. NO. BES257-B01	TITLE: 1.27 BOX HEADER
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1		X. ± 5.0°	X. ± 0.30	CHECKED:	DATE:	DUAL ROW SMT TYPE
					.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	BASE H5.70
					.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:	
					.XXX ± 1.0°	.XXX ± 0.10			