

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.10.10	李春桥

Specifications


Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass UL 94V-0

Insulation Material: Polyester, Nylon 6T


All materials must be GP materials

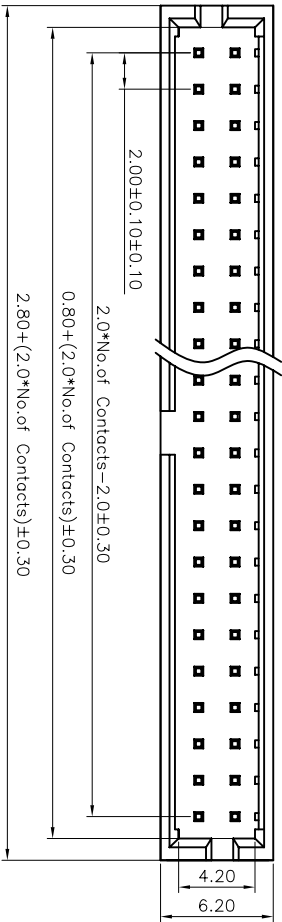

Recommended P.C.Board

Hole Layout



(Tolerance:±0.05)



Ordering Information

BFD220 - XX XX A 01

No. of Pins per Row Contact Plating
02~40 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin

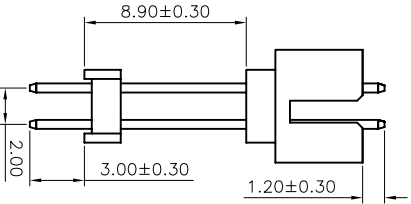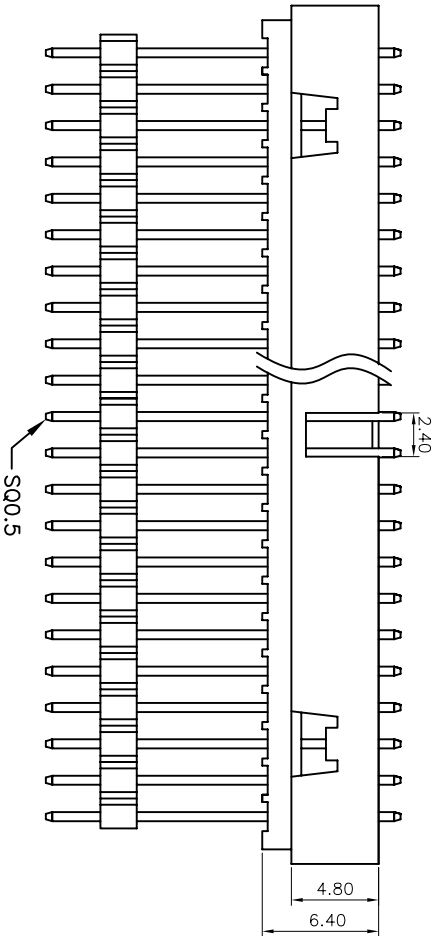

深圳市硕康达科技有限公司
ShenZhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2013.10.10

DWG. NO.

BFD220-A01

TITLE.

2.00 PIN BOX

DUAL ROWS DIP TYPE

REV.	01	UNIT.	mm	SCALE.	5:1	PAGE.	1/1
------	----	-------	----	--------	-----	-------	-----

X. ± 5.0"	X. ± 0.30
.X ± 3.0"	.X ± 0.25
.XX ± 2.0"	.XX ± 0.15
.XXX ± 1.0"	.XXX ± 0.10

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

PART NO.
BFD220-XX XX A01

BASE 6.4H