





REV.	LOOQS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.06.04	李春桥

Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be ROHS materials

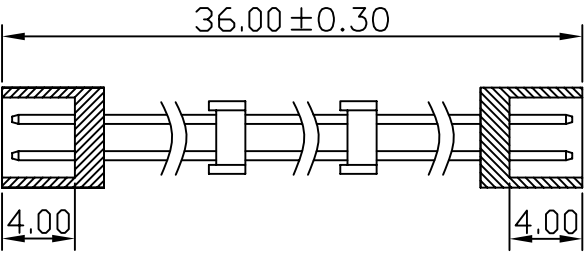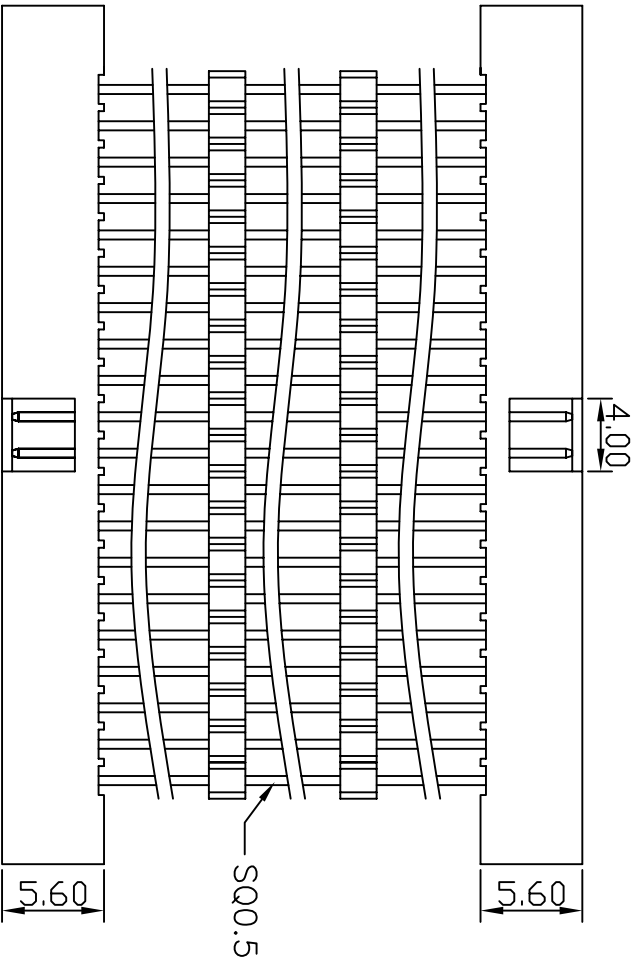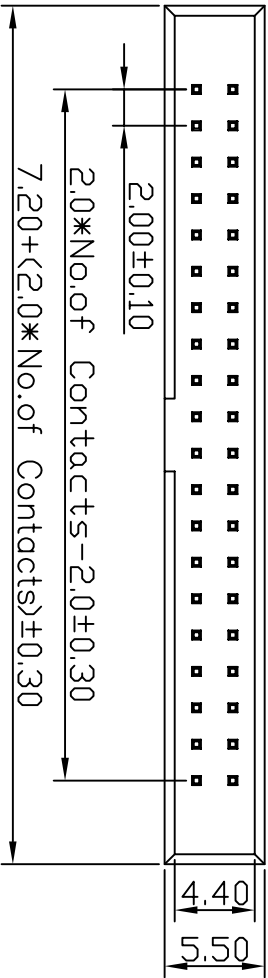

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)
SCALE: 1:2

Ordering Information

BFD222 - XX XX A 01

No. of Pins per Row
02~40

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
ShenzhenShi Sokcomm Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2013.06.04

DWG. NO.

BFD222-A01

TITLE.

2.00 PIN BOX

DUAL ROWS DIP TYPE

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

X* ± 5.0°	X. ± 0.30	CHECKED:
X* ± 3.0°	X. ± 0.25	AUDITED:
.XX* ± 2.0°	.XX ± 0.15	APPROVED:
.XXX* ± 1.0°	.XXX ± 0.10	

DATE:	DATE:

PART NO.
BFD222-XX XX A01

DATE: