




REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.		

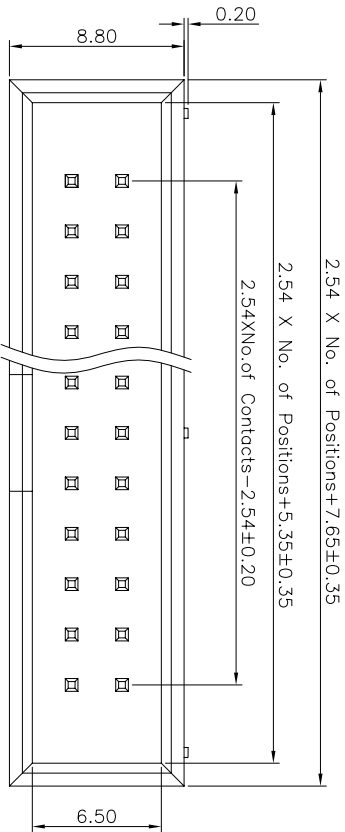

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials
Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
PBT/Nylon 6T
All materials must be ROHS materials


Recommended P.C.Board
Hole Layout

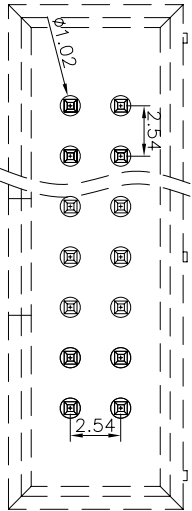

Ordering Information

BHD201 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

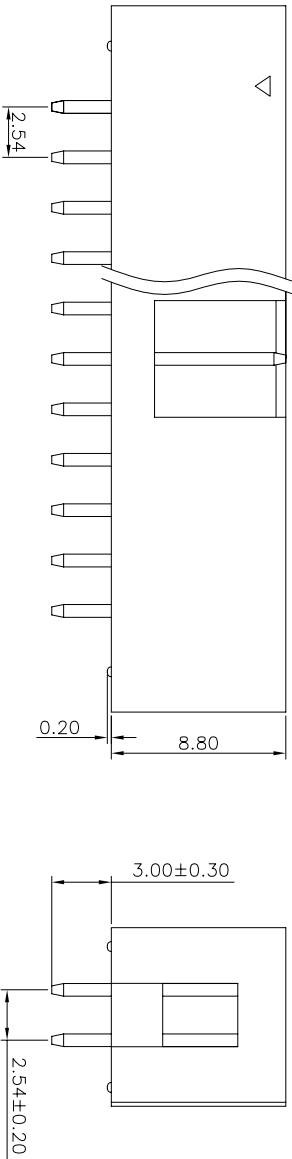

深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN:

DATE:

DWG. NO.

TITLE:

X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

BHD201-A01

2.54 PIN BOX

X. ± 3.0° X. ± 0.25

CHECKED:

DATE:

PART NO.

DUAL ROWS DIP TYPE

.XX ± 2.0° .XX ± 0.15

AUDITED:

DATE:

BHD201-XX XX A01

BASE 9.1H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F