



REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.06.20	李春桥

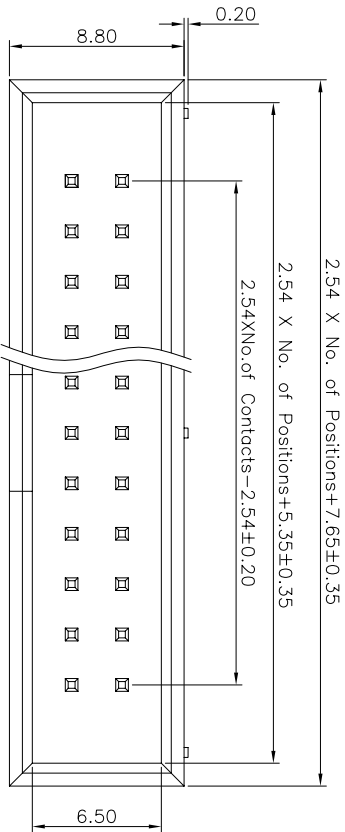

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass

Insulation Material: Polyester, UL 94V-0
PBT/Nylon 6T

All materials must be ROHS materials

Recommended P.C.Board


Hole Layout

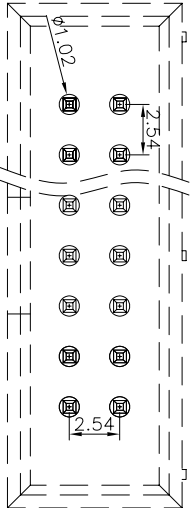

Ordering Information

BHD201 - XX XX A 02

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

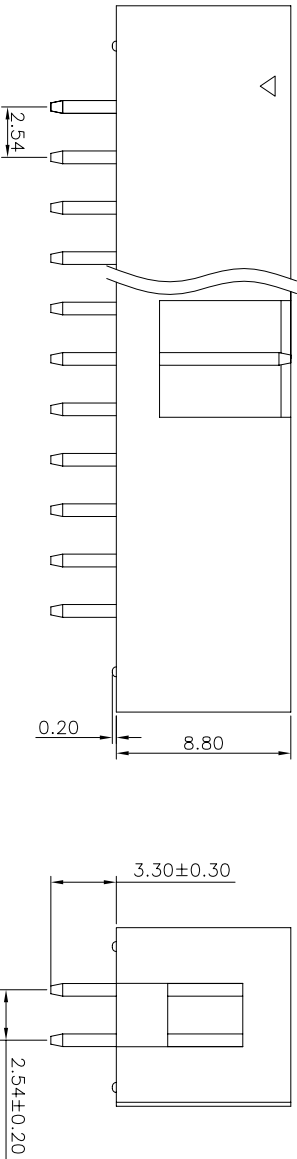

深圳市硕康达科技有限公司
ShenzhenShi Sokoon Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2013.06.20

DWG. NO.

BHD201-A02

TITLE.

2.54 PIN BOX

REV.

01

UNIT.

mm

SCALE.

1:1

PAGE.

1/1



X. ± 5.0°

X.

± 0.30

X. ± 3.0°

X

± 0.25

.XX ± 2.0°

.XX

± 0.15

.XXX ± 1.0°

.XXX

± 0.10

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

DATE:

DUAL ROWS DIP TYPE

BASE 9.1H