



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.06.07	李春桥

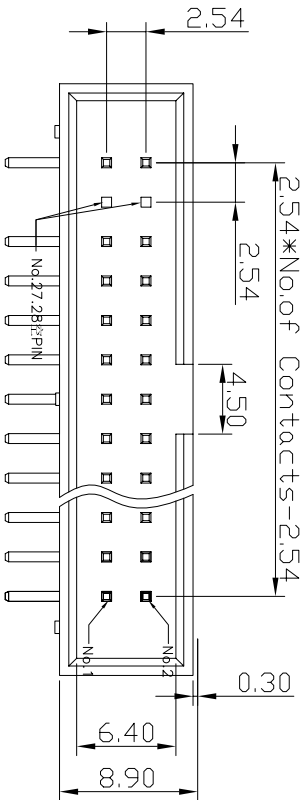

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 1000V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass

Insulation Material: Polyester, UL 94V-0 PBT

All materials must be ROHS materials

Recommended P.C.Board


Hole Layout

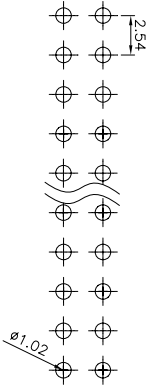

Ordering Information

BHR205 - XX XX A 01-1

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
05=Gold Flash /Tin
...

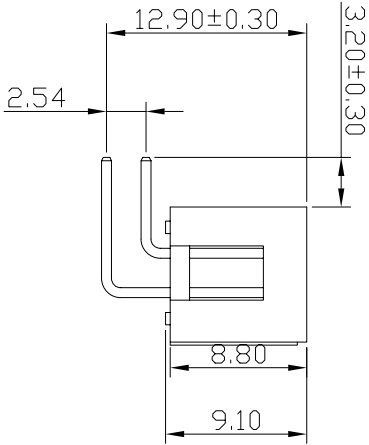

深圳市硕康达科技有限公司
Shenzhen Shi Yekangda Technology Co., Ltd

GENERAL TOLERANCE				DESIGN: 李春桥		DATE: 2007.06.07		DWG. NO. BHR205-A01-1		TITLE. 2.54 PIN BOX	
X.° ± 5.0°				CHECKED:		DATE:		PART NO.		DUAL ROWS R/A TYPE	
.X° ± 3.0°				AUDITED:		DATE:		BHR205-XX XX A01-1		BASE 9.1H	
.XX° ± 2.0°				APPROVED:		DATE:					
.XXX ± 1.0°											

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	