





REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2010.07.10	张荣

Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

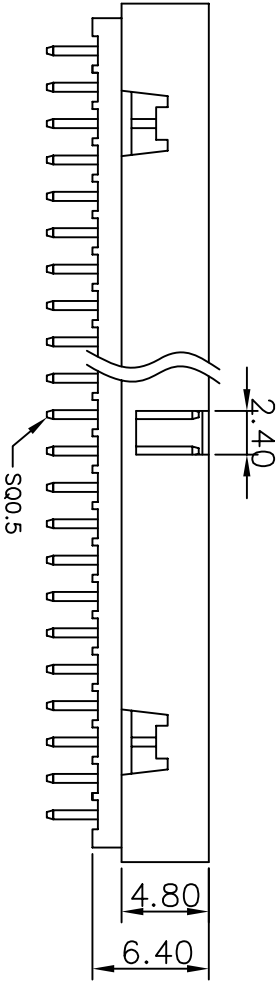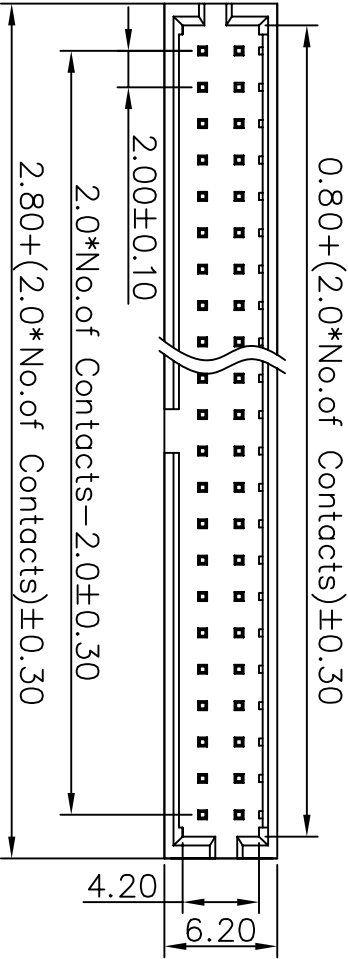

Recommended P.C.Board

Hole Layout
(Tolerance:±0.05)

Ordering Information

BOXD200 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2010.07.10

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

BOXD200-A01

TITLE.

2.00 PIN BOX

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.