

REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.03.15	尹晖






Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T

Recommended P.C.Board
Hole Layout

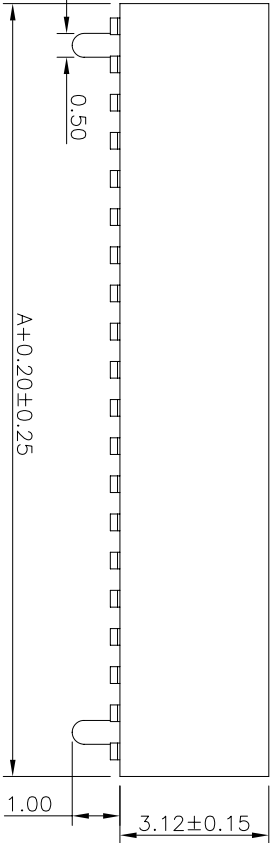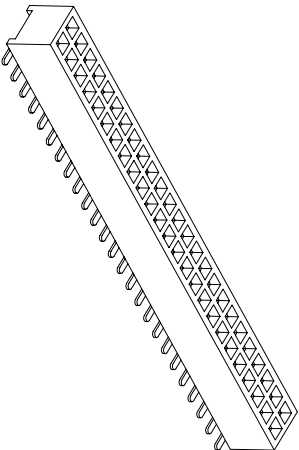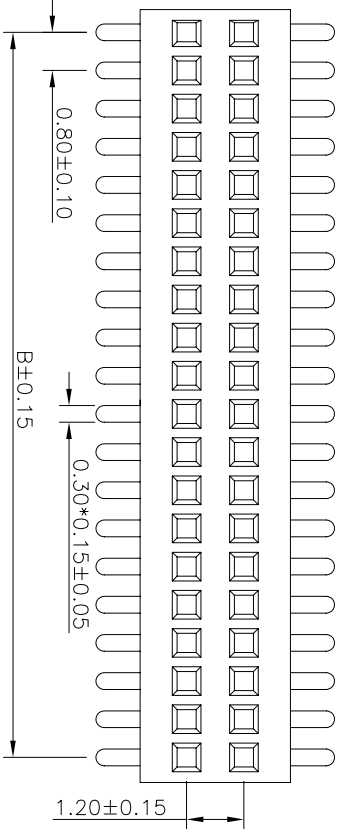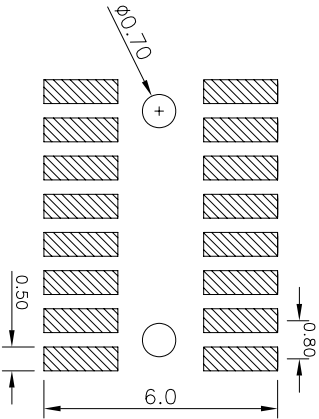

Circuits	Dimension		Circuits	Dimension		Circuits	Dimension	
	A	B		A	B		A	B
2 * 2	1.60	0.80	2 * 19	15.20	14.40	2 * 36	28.80	28.00
2 * 3	2.40	1.60	2 * 20	16.00	15.20	2 * 37	29.60	28.60
2 * 4	3.20	2.40	2 * 21	16.80	16.00	2 * 38	30.40	29.60
2 * 5	4.00	3.20	2 * 22	17.60	16.80	2 * 39	31.20	30.40
2 * 6	4.80	4.00	2 * 23	18.40	17.60	2 * 40	32.00	31.20
2 * 7	5.60	4.80	2 * 24	19.20	18.40	2 * 41	32.80	32.00
2 * 8	6.40	5.60	2 * 25	20.00	19.20	2 * 42	33.60	32.80
2 * 9	7.20	6.40	2 * 26	20.80	20.00	2 * 43	34.40	33.60
2 * 10	8.00	7.20	2 * 27	21.60	20.80	2 * 44	35.20	34.40
2 * 11	8.80	8.00	2 * 28	22.40	21.60	2 * 45	36.00	35.20
2 * 12	9.60	8.80	2 * 29	23.20	22.40	2 * 46	36.80	36.00
2 * 13	10.40	9.60	2 * 30	24.00	23.20	2 * 47	37.60	36.80
2 * 14	11.20	10.40	2 * 31	24.80	24.00	2 * 48	38.40	37.60
2 * 15	12.00	11.20	2 * 32	25.60	24.80	2 * 49	39.20	38.40
2 * 16	12.80	12.00	2 * 33	26.40	25.60	2 * 50	40.00	39.20
2 * 17	13.60	12.80	2 * 34	27.20	26.40			
2 * 18	14.40	13.60	2 * 35	28.00	27.20			

深圳市硕康达科技有限公司
ShenzhenShi Sokcoonn Technology Co., Ltd

GENERAL TOLERANCE

X.° ± 5.0°	X.° ± 0.30
X.° ± 3.0°	X.° ± 0.25
.XX° ± 2.0°	.XX° ± 0.15
.XXX° ± 1.0°	.XXX° ± 0.10

DESIGN: 尹晖

DATE: 2011.03.15

DWG. NO.

FBS201-B01

TITLE.

0.80 FEMALE HEADER

SINLGE ROW SMT TYPE

REV.	01	UNIT.	mm	SCALE.	1:1	PAGE.	1/1	APPROVED:	DATE:	PART NO.	FBS201-XX XX B01
------	----	-------	----	--------	-----	-------	-----	-----------	-------	----------	------------------