

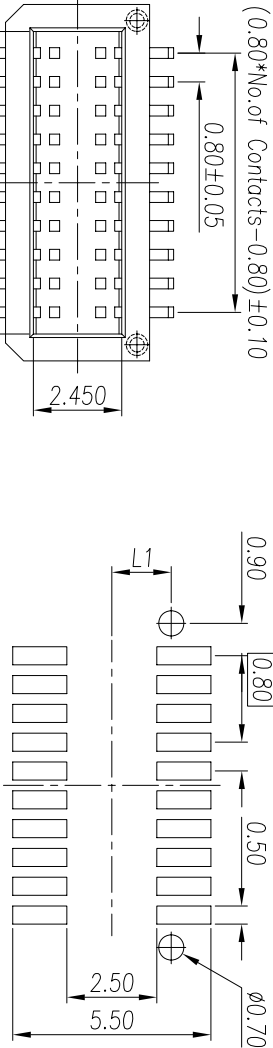
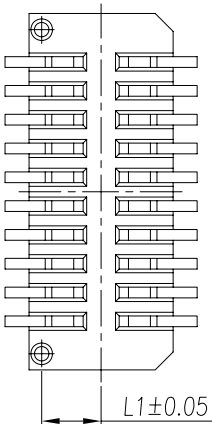


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.08.02	张 荣



RECOMMENDED P.C.BOARD LAYOUT

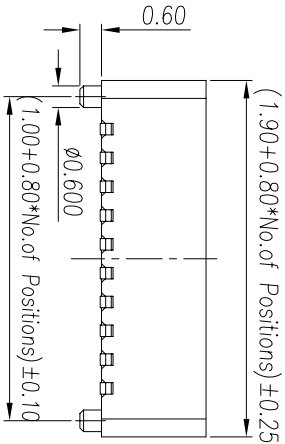

F/M ASSEM HEIGHT	PART NO.	L	L1
4.50H	FBS241-XX XX B01	2.90	1.650

Ordering Information

FBS241 - XX XX B 01

No. of Pins per Row
04~25

Contact Plating
01=Tin
02=Gold Flash
Duplex Plating
05=Gold Flash/Tin
11=15u" Gold Flash Standard
Duplex Plating
55=15u" Gold Flash/Tin
...

Specifications
Current Rating: 0.5Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
Nylon-9T
All materials must be GP materials

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

GENERAL TOLERANCE		DESIGN:	张 荣	DATE:	2007.08.02
X° ± 5.0°	X.	± 0.30	CHECKED:	DATE:	
.X° ± 3.0°	.X	± 0.25	AUDITED:	DATE:	
.XX° ± 2.0°	.XX	± 0.15	APPROVED:	DATE:	
.XXX° ± 1.0°	.XXX	± 0.10			

DWG. NO.		TITLE.
FBS241-B01		0.80 BOARD TO BOARD FEMALE ASSEMBLY
PART NO.		
FBS241-XX XX B01		