


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.21	张 荣

Recommended P.C.Board

Hole Layout

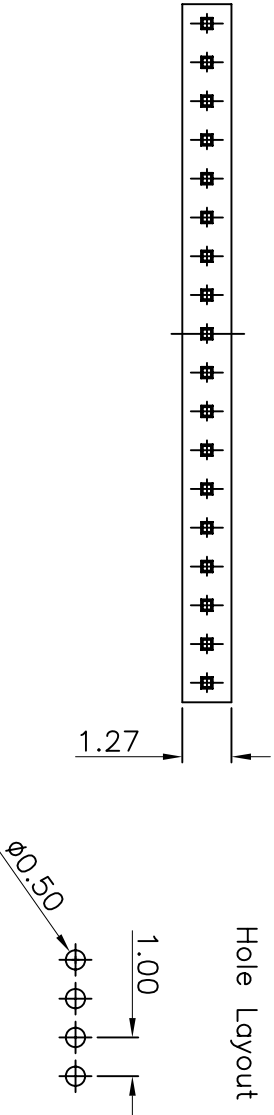

Specifications


Current Rating: 1Amp
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulator Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

Ordering Information

FCD101 - XX XX A 01 - X
No. of Pins per Row Contact Plating
02~50 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=CAP
T=T&R
PT=CAP+T&R

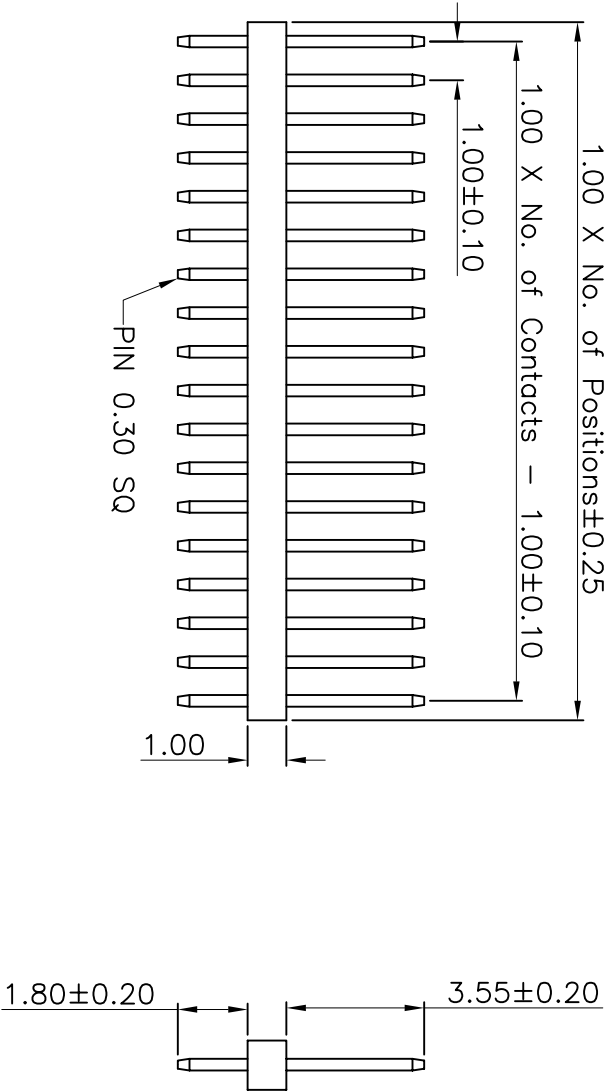

深圳市硕康达科技有限公司
ShenZhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张 荣

DATE: 2007.11.21

DWG. NO.

FCD101-A01

TITLE.

1.00 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 1.00H

X. ± 5° X. ± 0.30

CHECKED:

DATE:

PART NO.

FCD101-XX XX A01-X

.X. ± 2° .X. ± 0.20

AUDITED:

DATE:

DATE:

.XX. ± 1° .XX. ± 0.15

APPROVED:

DATE:

DATE:

.XXX ± 0.5° .XXX ± 0.10

DATE:

DATE:

X. ± 5° X. ± 0.30

CHECKED:

DATE:

PART NO.

FCD101-XX XX A01-X

TITLE.

1.00 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 1.00H

.X. ± 2° .X. ± 0.20

AUDITED:

DATE:

PART NO.

FCD101-XX XX A01-X

TITLE.

1.00 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 1.00H

.XX. ± 1° .XX. ± 0.15

APPROVED:

DATE:

DATE:

.XXX ± 0.5° .XXX ± 0.10

DATE:

DATE: