



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.04	张荣

Specifications


Current Rating: 0.5Amp
Insulation Resistance: 500M Ω min.
Dielectric Withstanding: 200VAC
Contact Resistance: 40m Ω Max.
Operating Temperature:-40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Nylon 6T
All Material must be G.P. Material

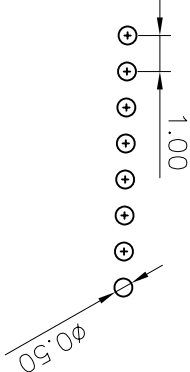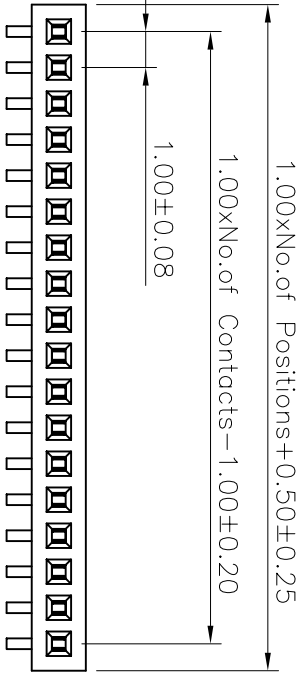

RECOMMENDED P.C. BOARD LAYOUT

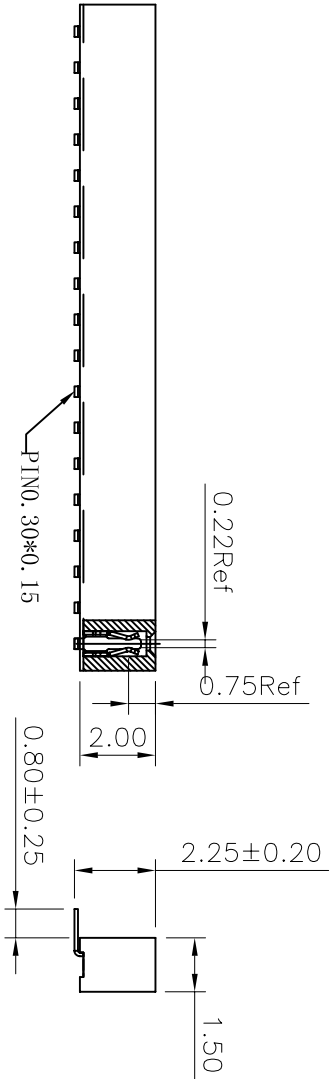

Ordering Information

FCR101 - XX XX A 01

No. of Pins per Row Contact Plating
02~25 01=Tin
02=Gold Flash
05=Gold Flash/Tin
...



深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

REV.	UNIT.	SCALE.	PAGE.	DESIGN:	张荣	DATE:	2007.10.04	DWG. NO.	FCR101-A01	TITLE.	1.00 FEMALE HEADER SINGLE ROW R/A TYPE BASE 2.00H
01	mm	5:1	1/1	CHECKED:		DATE:		PART NO.	FCR101-XX XX A 01		
				AUDITED:		DATE:					
				APPROVED:		DATE:					