


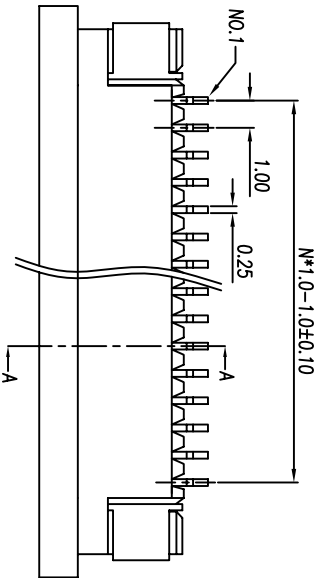
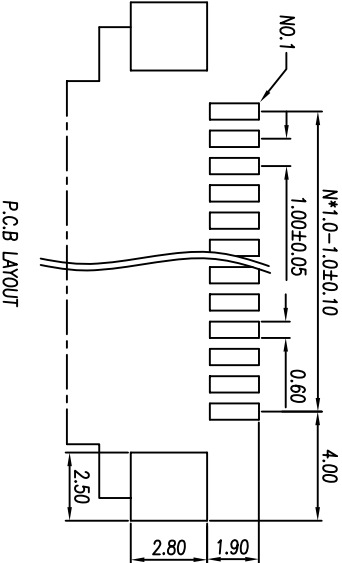


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张荣

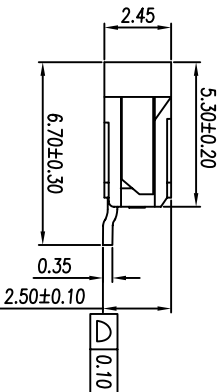


NOTE:
1. Material:
Housing: Heat Resistance Plastic (UL94V-0) Nylon 46
Actuator: Heat Resistance Plastic (UL94v-0) PPS
Contact: Copper Alloy
All materials must be GP materials

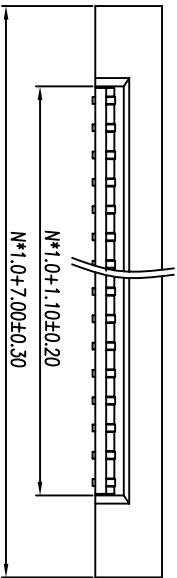

Ordering Information

FCS108 - XX XX A 01

No. of Pins per Row Contact Plating
04~40 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

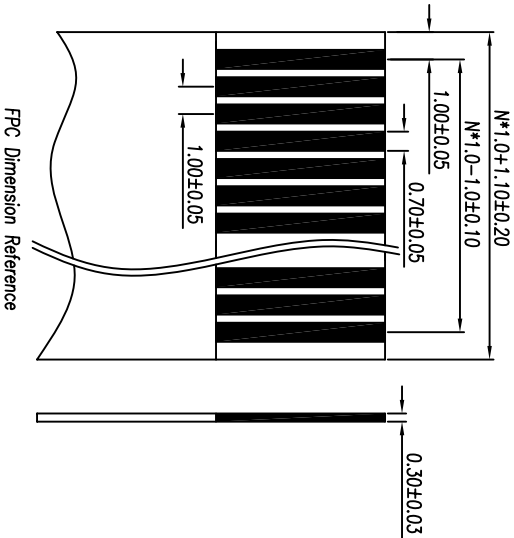

深圳市碩康達科技有限公司 ShenZhenShi Sokcomm Technology Co., Ltd				GENERAL TOLERANCE				DESIGN: 张荣		DATE: 2007.09.15		DWG. NO. FCS108-A01		TITLE. PITCH 1.0mm FPC SMT TYPE BOTTOM CONTACT	
				X.* ± 5.0°		X. ± 0.30		CHECKED:							
				.X.* ± 3.0°		.X ± 0.25		AUDITED:							
				.XX.* ± 2.0°		.XX ± 0.15		DATE:							
				.XXX.* ± 1.0°		.XXX ± 0.10		APPROVED:							
				DATE:											