
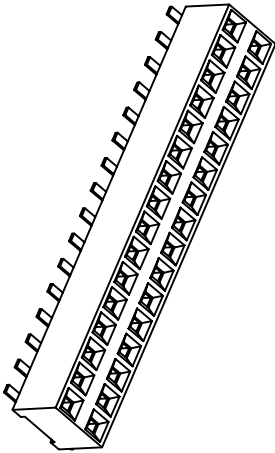


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.04.26	李春桥

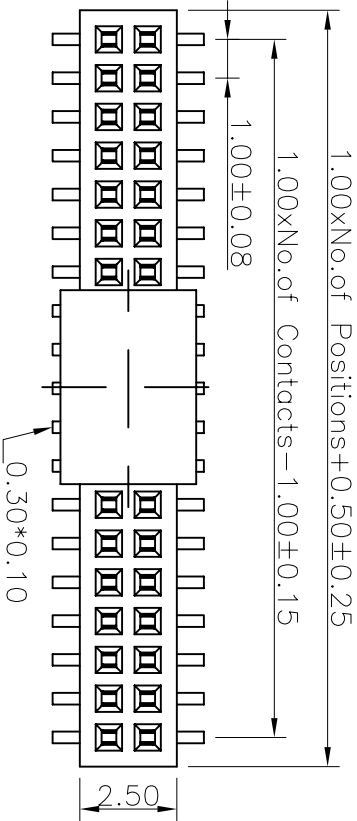

Specifications
Current Rating: 0.5Amp
Insulation Resistance: 500M Ω min.
Dielectric Withstanding: 200VAC
Contact Resistance: 40m Ω Max.
Operating Temperature:-40C to +105C


Materials

Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0

Nylon 6T

All Material must be ROHS Material

Recommended P.C.Board



Ordering Information

FCSC211 - XX XX A 02 - X

No. of Pins per Row Contact Plating
01=TiN Options
02=Gold Flash P=CAP
Duplex plating T=T&R
03=Gold Flash/Tin PT=CAP+T&R

Duplex plating
03=Gold Flash/Tin
...



深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2014.04.26

DWG. NO.

FCSC211-A02

TITLE:

1.00 FEMALE HEADER
DUAL ROWS SMT TYPE
BASE 2.00H

X. $\pm$ 5° X. $\pm$ 0.30

CHECKED:

DATE:

DWG. NO.

FCSC211-A02

TITLE:

1.00 FEMALE HEADER
DUAL ROWS SMT TYPE
BASE 2.00H

X. $\pm$ 2° X. $\pm$ 0.20

CHECKED:

DATE:

DWG. NO.

FCSC211-A02

TITLE:

1.00 FEMALE HEADER
DUAL ROWS SMT TYPE
BASE 2.00H

.XX $\pm$ 1° .XX $\pm$ 0.15

CHECKED:

DATE:

DWG. NO.

FCSC211-A02

TITLE:

1.00 FEMALE HEADER
DUAL ROWS SMT TYPE
BASE 2.00H

.XXX $\pm$ 0.5° .XXX $\pm$ 0.10

CHECKED:

DATE:

DWG. NO.

FCSC211-A02

TITLE:

1.00 FEMALE HEADER
DUAL ROWS SMT TYPE
BASE 2.00H

REV. 01 UNIT. mm SCALE. 1:1 PAGE. 1/1

DESIGN: 李春桥

CHECKED:

DATE:

DWG. NO.

FCSC211-A02

TITLE:

1.00 FEMALE HEADER
DUAL ROWS SMT TYPE
BASE 2.00H