




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.12.14	张 荣

Specifications

Current Rating: 0.5Amp
Insulation Resistance: 500M Ω Min.
Dielectric Withstanding: 200VAC
Contact Resistance: 40m Ω Max.
Operating Temperature:-40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Nylon 6T
All Material must be G.P Material

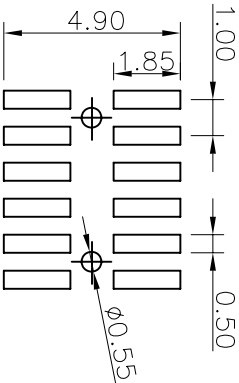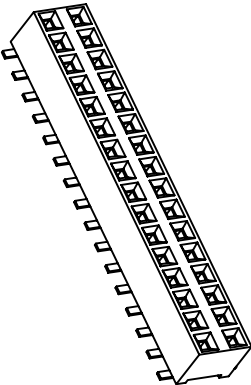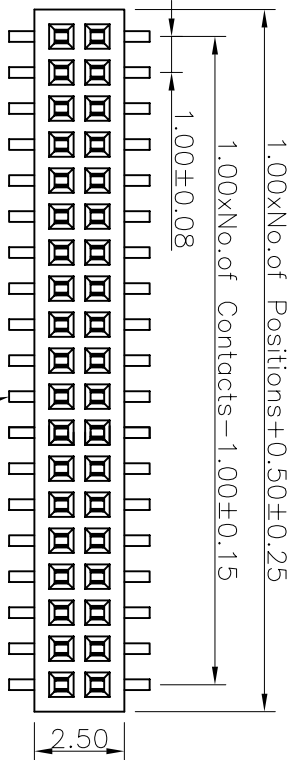


RECOMMENDED P.C.BOARD LAYOUT

Ordering Information

FCS211 - XX XX B 01

No. of Pins per Row Contact Plating
02~50
01=Tin
02=Gold Flash
Duplex Plating
05=Gold Flash/Tin
...

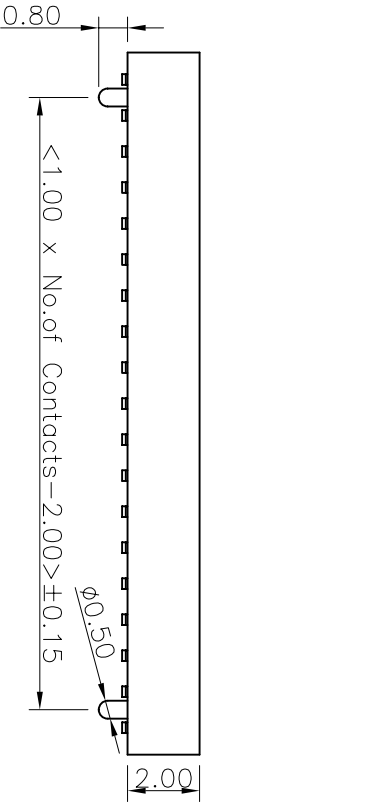

深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张 荣

DATE: 2007.12.14

DWG. NO.

FCS211-B01

TITLE.

1.00 FEMALE HEADER

X⁺ ± 5⁺ X⁻ ± 0.30

CHECKED:

DATE:

X⁺ ± 2⁺ X⁻ ± 0.20

AUDITED:

DATE:

.XX⁺ ± 1⁺ .XX⁻ ± 0.15

.XXX⁺ ± 0.5⁺ .XXX⁻ ± 0.10

APPROVED:

DATE:

PART NO.

FCS211-XX XX B 01

DUAL ROWS SMT TYPE

BASE 2.00H

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9