

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.03.02	张荣





1.Specifications

Current Rating: 1Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20m Ω Max.
Operating Temperature:-40°C to +105°C

2.Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
NYLON-6T

All materials must be GP materials

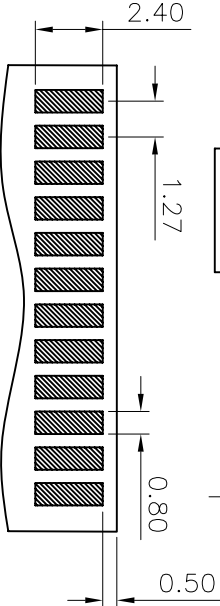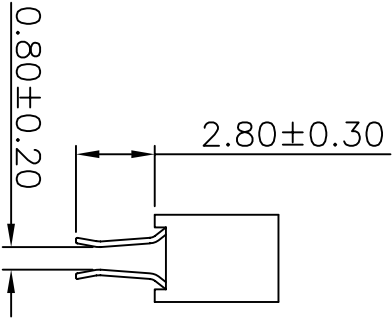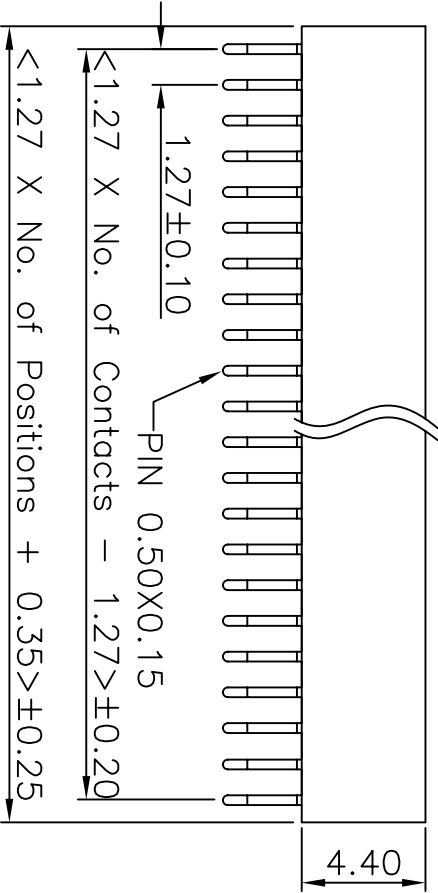

Recommended P.C.B Layout
(Tolerance:±0.05)

Ordering Information

FEA204 - XX XX A 01

No. of Pins per Row
02~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating



深圳市硕康达科技有限公司
ShenzhenShi Sokcorn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张荣

DATE: 2008.03.02

DWG. NO.

FEA204-A01

TITLE.

REV. 01 UNIT. mm SCALE. 3:1 PAGE. 1/1

X* ± 5°	X. ± 0.30
X* ± 2°	X. ± 0.20
.XX* ± 1°	.XX ± 0.15
.XXX* ± 0.5°	.XXX ± 0.10

CHECKED: DATE: AUDITED: DATE: APPROVED: DATE:

PART NO. FEA204-XX XX A01

1.27 FEMALE HEADER
DUAL ROWS DIP TYPE
BASE 4.30H