

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.08.30	尹 晖

Specifications


Current Rating: 1Amp
Insulation Resistance: 1000M Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
Nylon-6T

All materials must be GP materials




Recommended P.C.Board
Hole Layout



Ordering Information

FED104 - XX XX A 01

No. of Pins per Row Contact Plating
02~50 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

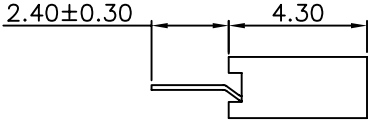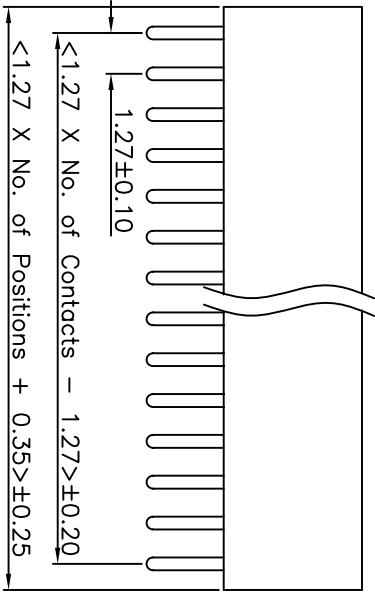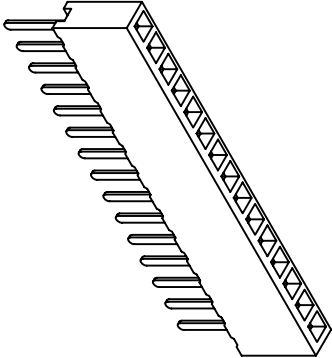

深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN:

尹 晖

DATE: 2012.08.30

DWG. NO.

FED104-A01

TITLE:

1.27 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 4.30H

X. ± 5°

X.

± 0.30

CHECKED:

DATE:

PART NO.

FED104-XX XX A01

TITLE:

1.27 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 4.30H

X. ± 2°

X.

± 0.20

AUDITED:

DATE:

PART NO.

FED104-XX XX A01

TITLE:

1.27 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 4.30H

.XX ± 1°

.XX

± 0.15

APPROVED:

DATE:

PART NO.

FED104-XX XX A01

TITLE:

1.27 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 4.30H

.XXX ± 0.5°

.XXX

± 0.10

APPROVED:

DATE:

PART NO.

FED104-XX XX A01

TITLE:

1.27 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 4.30H

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F