
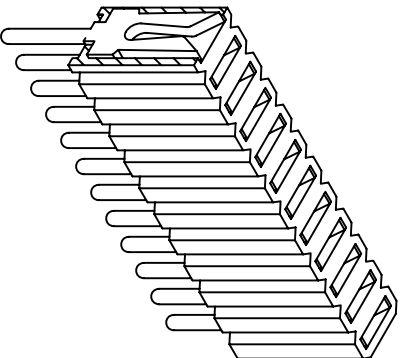


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.08.30	尹 晖



Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
NYLON-6T

All materials must be GP materials

Recommended P.C.Board

Hole Layout



(Tolerance: ±0.05)

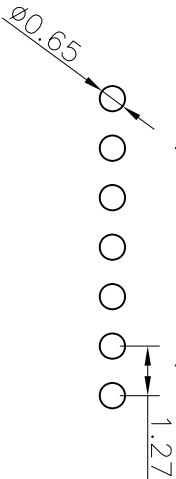

Ordering Information

FED106 - XX XX A 01

No. of Pins per Row Contact Plating
01~50
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

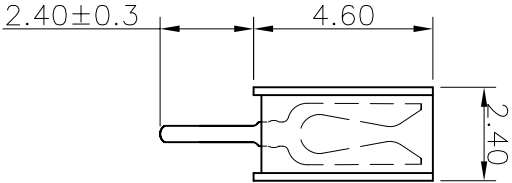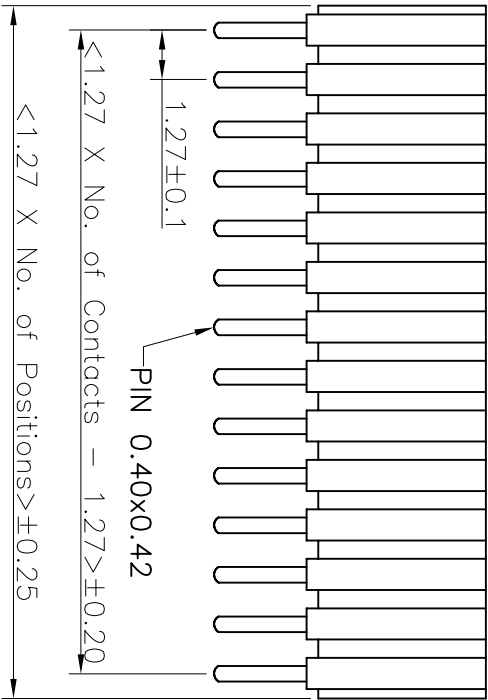

深圳市硕康达科技有限公司
ShenzhenShi Sokcon Technology Co., Ltd

GENERAL TOLERANCE

REV.	UNIT.	SCALE.	PAGE.		X _s ± 5°	X _s ± 2°	.XX ± 1°	.XXX ± 0.5°
01	mm	1:1	1/1		± 0.30	± 0.20	± 0.15	± 0.10

DESIGN: 尹 晖

DATE: 2012.08.30

DWG. NO.

FED106-A01

TITLE.

1.27 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 4.60