

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.12.02	张荣






Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
NYLON-6T

All materials must be GP materials

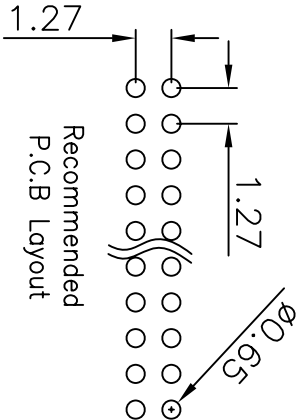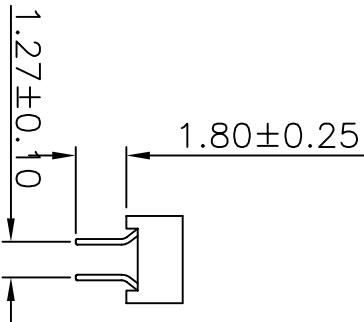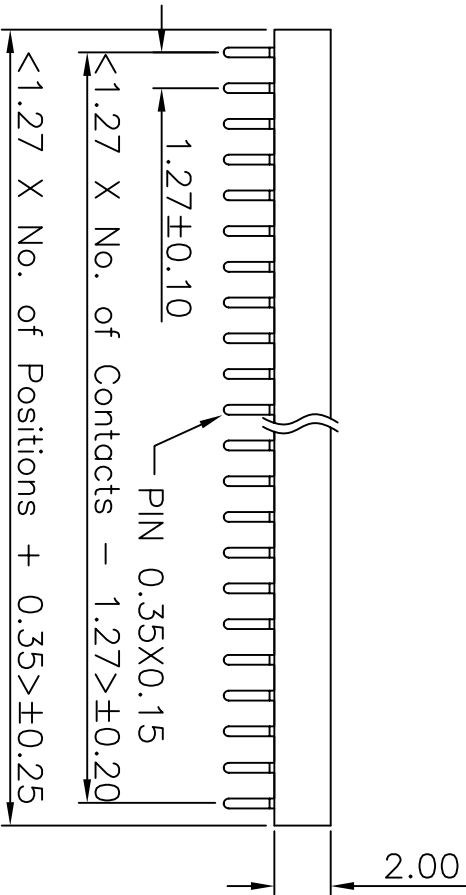

Ordering Information

FED202 - XX XX A 01

No. of Pins per Row
02~50
Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenZhenShi Sokcom Technology Co., Ltd					GENERAL TOLERANCE		DESIGN: 张荣	DATE: 2007.12.02	DWG. NO. FED202-A01	TITLE: 1.27 FEMALE HEADER DUAL ROWS DIP TYPE BASE 2.00H
REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1		X. ± 5°	X. ± 0.30	CHECKED:	DATE:		
					X. ± 2°	X. ± 0.20	AUDITED:	DATE:		
					.XX ± 1°	.XX ± 0.15	APPROVED:	DATE:		
					.XXX ± 0.5°	.XXX ± 0.10				