


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.04.04	李春桥

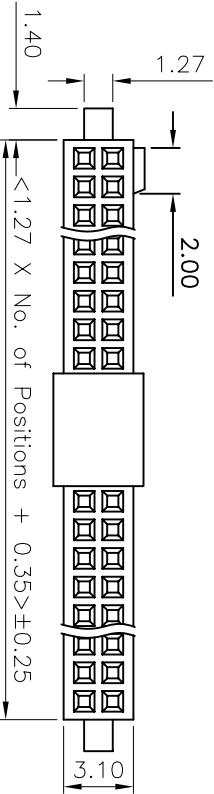

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20m Ω Max.

Operating Temperature:

Tin plating: -40°C to +105°C

Gold plating: -40°C to +105°C




Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

Nylon 6T

Recommended P.C.Board
Layout
(Tolerance:±0.05)

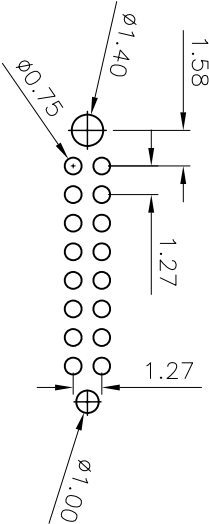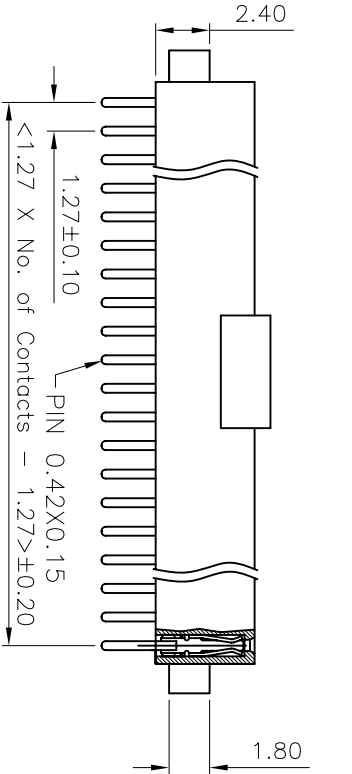

Ordering Information

FED202 - XX XX D 01-1 - X

No. of Pins per Row Contact Plating Options
01=Tin P=OSP
02=Gold Flash T=16K
Duplex plating C=CAK-T&R
03=Gold Finish Cr=Cr-100
04=Gold 3u" /1in TC=acetic
05=Gold 30u" /1in tape+tape reel



深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2014.04.04

DWG. NO.

FED202-D01-1

TITLE.

1.27 FEMALE HEADER

DUAL ROW DIP TYPE

REV.	UNIT.	SCALE.	PAGE.	APPROVED:	DATE:	PART NO.	TITLE.
01	mm	1:1	1/1			FED202-XXXXD01-1-XX	

