


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.07.25	李善桥




Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
NYLON 6T

All materials must be ROHS materials

Recommended P.C.B Layout

(Tolerance:±0.05)

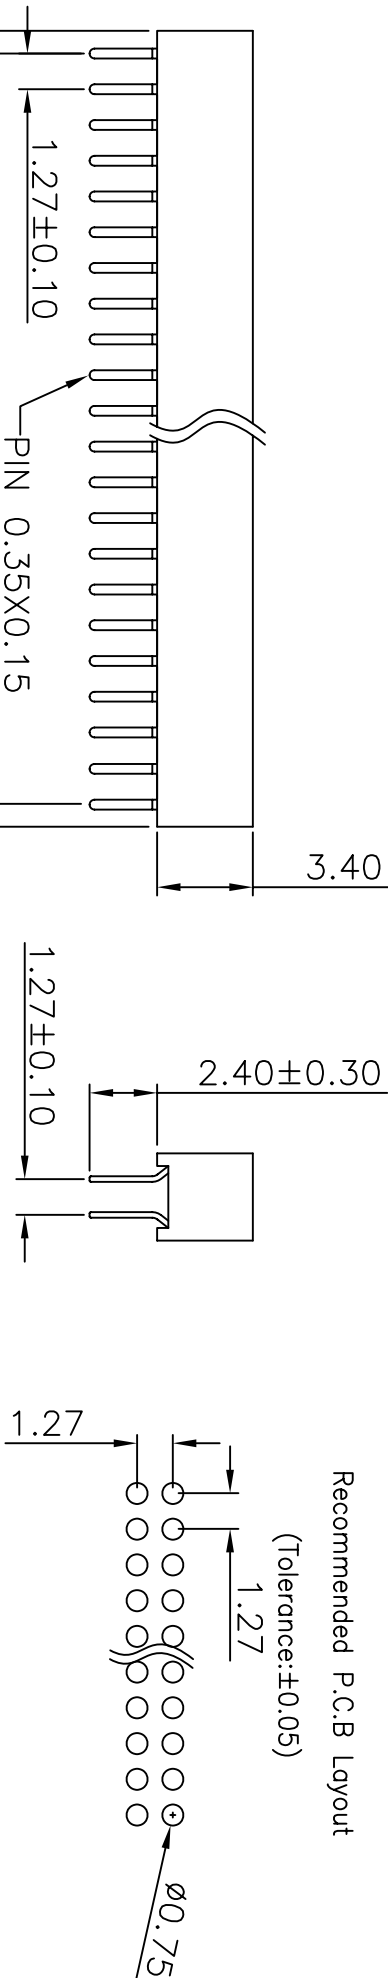

Ordering Information

FED203 - XX XX A 01

No. of Pins per Row
02~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

塑胶	PHF1.27*H3.4 1*xxPIN
五金	PHF1.27*H3.4 DIP PC2.4 U端

GENERAL TOLERANCE

X* ± 5°	X. ± 0.30
X* ± 2°	X. ± 0.20
.XX ± 1°	.XX ± 0.15
.XXX ± 0.5°	.XXX ± 0.10

DESIGN: 李善桥

DATE: 2013.07.25

DWG. NO.

FED203-A01

TITLE.

1.27 FEMALE HEADER
DUAL ROWS DIP TYPE
BASE 3.40H



深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

.XX ± 1°	.XX ± 0.15
.XXX ± 0.5°	.XXX ± 0.10

AUDITED:

DATE:

PART NO.

FED203-XX XX A01

TITLE.

1.27 FEMALE HEADER
DUAL ROWS DIP TYPE
BASE 3.40H