



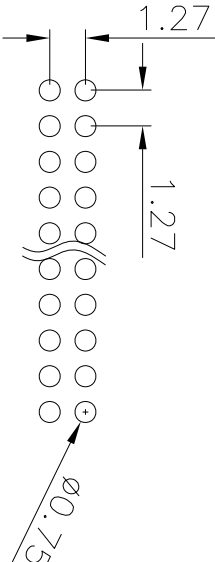


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.03.02	尹 晖

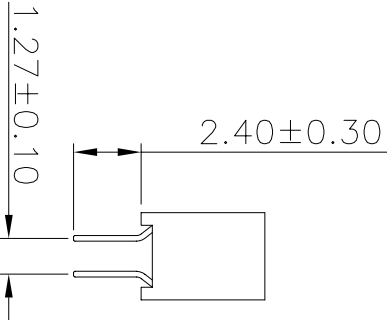

- ### 1.Specifications
- Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

- ### 2.Materials
- Contact Material: Phosphor Bronze/Gold/Tin
Insulation Material: Polyester, UL 94V-0
NYLON-6T/LCP
All materials must be GP materials

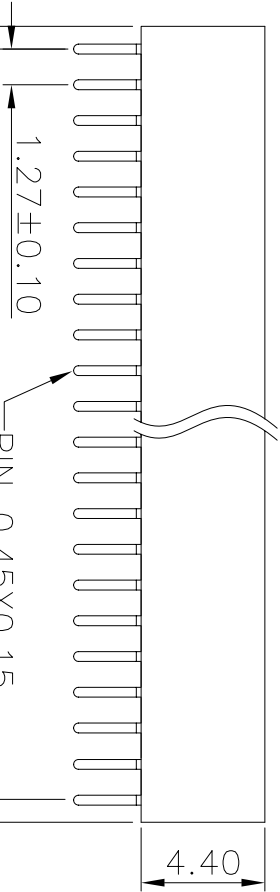

Ordering Information

FED204 - XX XX A 01

No. of Pins per Row
02~50
Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenzhenShi Sokcom Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2008.03.02	DWG. NO. FED204-A01	TITLE. 1.27 FEMALE HEADER DUAL ROWS DIP TYPE BASE 4.40H	
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1		X° ± 5°	X. ± 0.30	CHECKED:	DATE:		PART NO. FED204-XX XX A01
					X° ± 2°	.X ± 0.20	AUDITED:	DATE:		
					.XX° ± 1°	.XX ± 0.15	APPROVED:	DATE:		
					.XXX° ± 0.5°	.XXX ± 0.10				

深圳市硕康达科技有限公司
ShenzhenShi Sokcoonn Technology Co., Ltd



REV. 01 UNIT. mm SCALE. 1:1 PAGE. 1/1