REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.06.20	李春桥

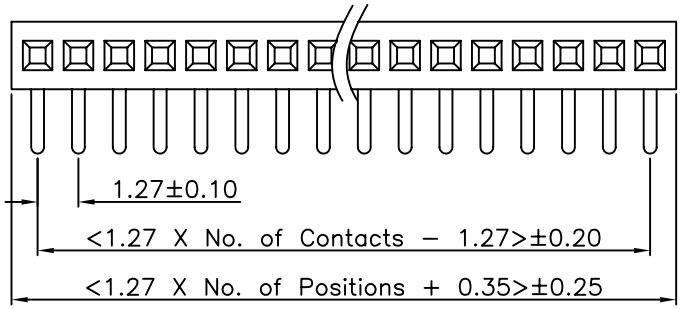



Specifications

Current Rating: 1Amp
Insulation Resistance: 1000M Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V−0
Nylon−6T
All materials must be GP materials

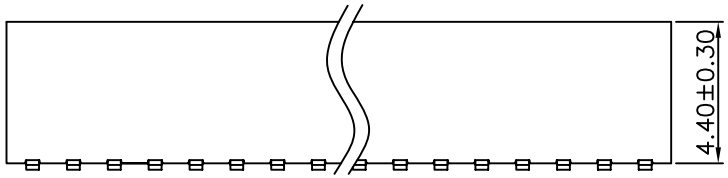



Recommended P.C.Board
Hole Layout



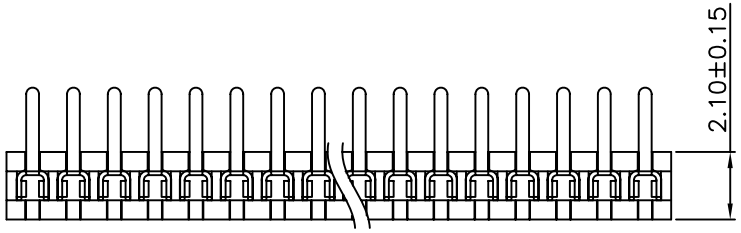

Ordering Information

FER101 − XX XX A 02

No. of Pins per Row
02~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
…

深圳市硕康达科技有限公司 ShenZhenShi Sokconn Technology Co.,Ltd	GENERAL TOLERANCE		DESIGN: 李春桥	DATE: 2013.06.20	DWG. NO. FER101−A02	TITLE. 1.27 FEMALE HEADER SINGLE ROW DIP/R TYPE BASE 4.30H
	X.° ± 5°	X. ± 0.30	CHECKED:	DATE:		
	.X° ± 2°	.X ± 0.20	AUDITED:	DATE:	PART NO. FER101−XX XX A02	
	.XX° ± 1°	.XX ± 0.15	APPROVED:	DATE:		
	.XXX° ± 0.5°	.XXX ± 0.10				
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1			