






REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.02.04	? ?

1.Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40℃ to +105℃

2.Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
NYLON-6T
All materials must be GP materials

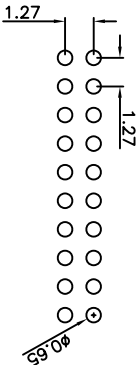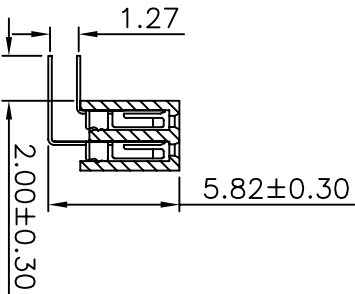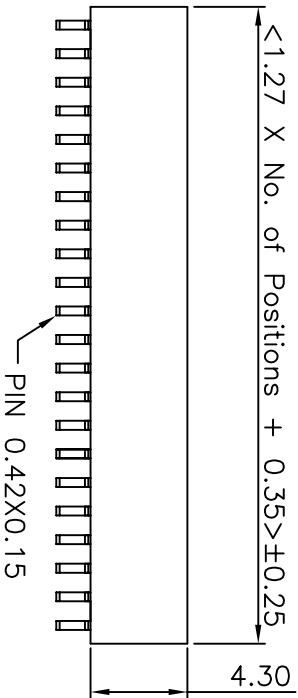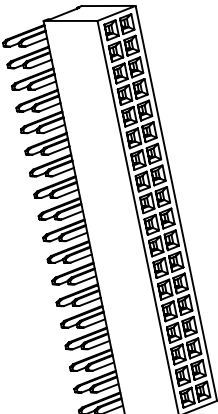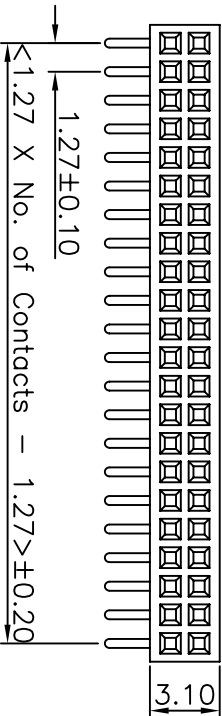

Recommended P.C.Board
Hole Layout

Ordering Information

FER204 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

Sakcom ShenzhenShi Sakcom Technology Co., Ltd 深圳市硕康达科技有限公司				GENERAL TOLERANCE		DESIGN: 张 荣	DATE: 2012.02.04	DWG. NO. FER204-A01	TITLE. 1.27 FEMALE HEADER
REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1		X* ± 5°	X. ± 0.30	CHECKED:	DATE:	1.27 FEMALE HEADER
					X* ± 2°	X. ± 0.20	AUDITED:	DATE:	DUAL ROWS R/A TYPE
					.XX* ± 1°	.XX ± 0.15	APPROVED:	DATE:	BASE 4.30H
					.XXX ± 0.5°	.XXX ± 0.10			

A

B

C

D

E

F

A

B

C

D

E

F