



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.05.29	张荣

1.Specifications

Current Rating: 1Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20m Ω Max.
Operating Temperature:-40°C to +105°C

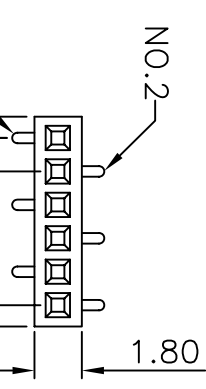

Recommended P.C.B Layout

(Tolerance:±0.05)

2.Materials


Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
NYLON-6T

All materials must be GP materials

Ordering Information

FES103 - XX XX A 01 - X

No. of Pins per Row Contact Plating
02~50
01=Tin
02=Gold Flash
Duplex Plating
05=Gold Flash /Tin
Options
P=CAP
T=T&R
PT=CAP+T&R

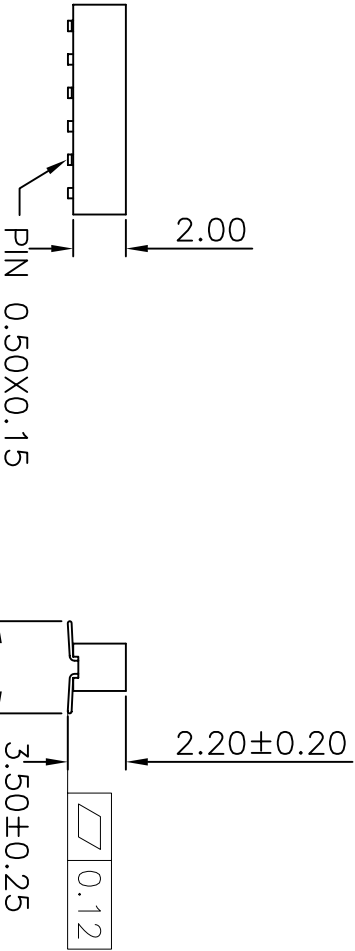

深圳市硕康达科技有限公司
ShenzhenShi Sokcomm Technology Co., Ltd

GENERAL TOLERANCE

X. [°] ± 5 [°]	X. ± 0.30
.X [°] ± 2 [°]	.X ± 0.20
.XX [°] ± 1 [°]	.XX ± 0.15
.XXX [°] ± 0.5 [°]	.XXX ± 0.10

DESIGN: 张荣

DATE: 2008.05.29

DWG. NO.

FES103-A01

TITLE.

1.27 FEMALE HEADER
SINGLE ROW SMT TYPE
BASE 2.00H

A

B

C

D

E

F

A

B

C

D

E

F