


| REV. | LOCAS. | DESCRIPTION      | DATE       | DRAWN |
|------|--------|------------------|------------|-------|
| 01   |        | INITIAL RELEASE. | 2014.04.04 | 李春桥   |

Specifications


Current Rating: 1Amp  
Insulation Resistance: 1000M  $\Omega$  Min.  
Dielectric Withstanding: 300V AC/DC  
Contact Resistance: 20m $\Omega$  Max.

Operating Temperature:  
Tin plating: -40°C to +105°C  
Gold plating: -40°C to +105°C

Materials  
Contact Material: Phosphor Bronze  
Insulation Material: Polyester, UL 94V-0  
Nylon 6T

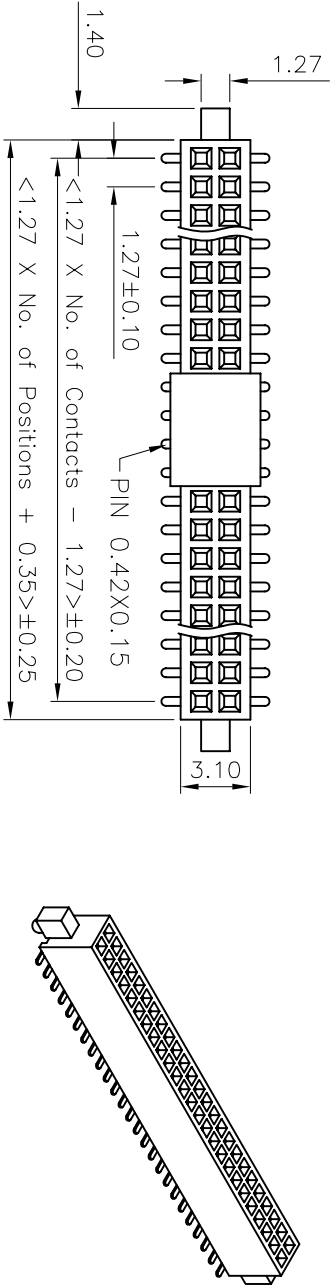


Recommended P.C.Board  
Layout  
(Tolerance:±0.05)

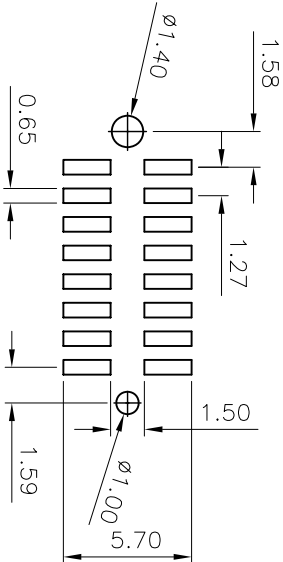

Ordering Information

FES202 - XX XX B 02 - X

No. of Pins per Row Contact Plating  
02~50  
Options  
P=CAP  
T=Tin  
02=Gold Flash  
Duplex plating  
05=Gold Flash  
08=Gold 3u"/Tin  
35=Gold 30u"/Tin  
PT=CAP+TAR  
C=acetate tape  
TC=acetate tape+tape reel

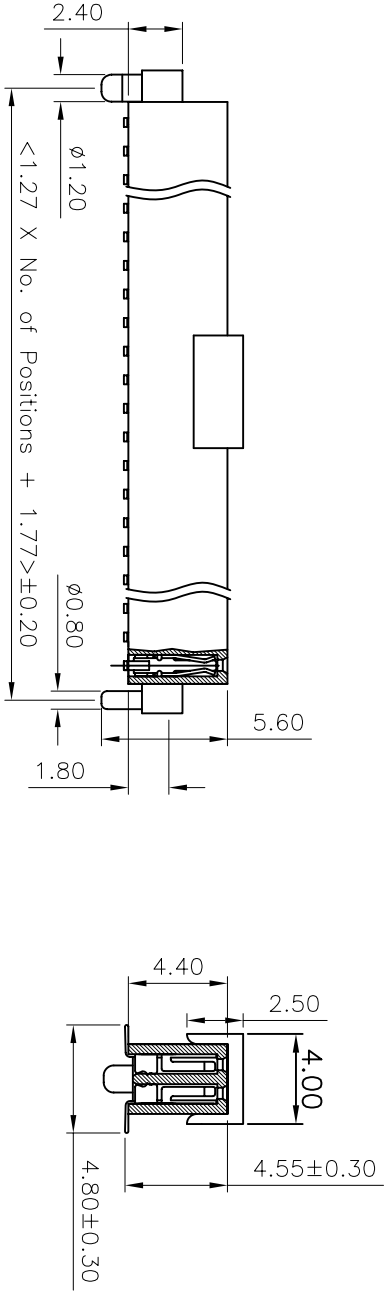

深圳市硕康达科技有限公司  
ShenzhenShi Sokoon Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥  
DATE: 2014.04.04

DWG. NO. FES202-B02

TITLE. 1.27 FEMALE HEADER

X. ± 5° X. ± 0.30

CHECKED: DATE:

PART NO.

DUAL ROW SMT TYPE

X. ± 2° X. ± 0.20

AUDITED: DATE:

FES202-XX XX B02-XX

W/POST

.XX ± 1° .XX ± 0.15

APPROVED: DATE:

| REV. | UNIT. | SCALE. | PAGE. |  |
|------|-------|--------|-------|--|
| 01   | mm    | 1:1    | 1/1   |  |