

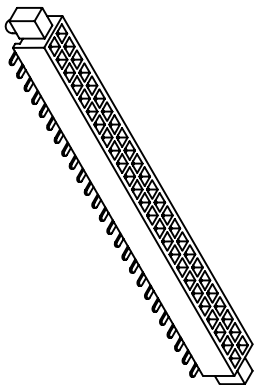


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.04.17	李春桥

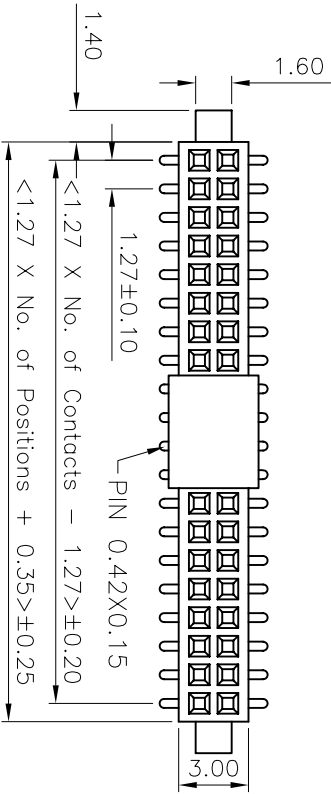


Specifications
Current Rating: 1Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20m Ω Max.
Operating Temperature:
Tin plating: -40°C to +105°C
Gold plating: -40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
Nylon 6T

**Recommended P.C.Board
Layout**
(Tolerance: ± 0.05)

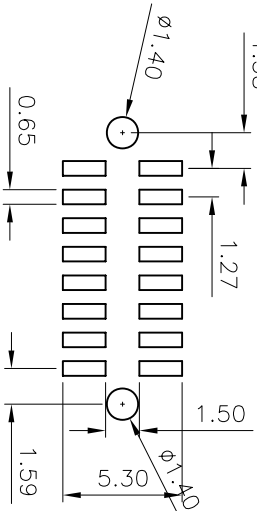

Ordering Information

FES206	-	XX	XX	B	01	-	X
No. of Pins per Row Contact Plating							
02~50							
Options							
01=1in							
02=Gold Flash							
Duplex plating							
05=Gold Flash							
08=Gold 3u" / 7in							
35=Gold 30u" / 7in							
Tape-tape reel							

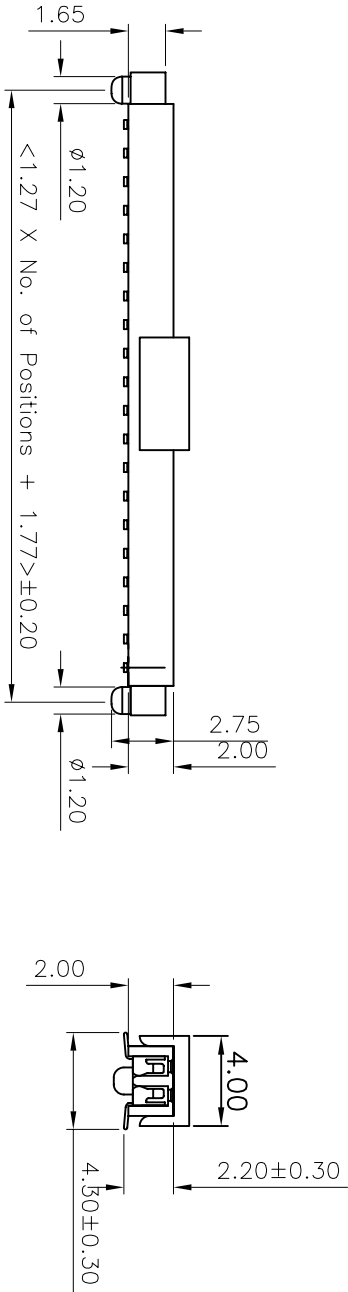

深圳市硕康达科技有限公司
Shenzhen Shi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2013.04.17

DWG. NO.

FES206-B01

TITLE: 1.27 FEMALE HEADER

DUAL ROW SMT TYPE

REV. 01 UNIT. mm SCALE. 1:1 PAGE. 1/1

SCALE. 1:1

PAGE. 1/1



X. ± 5°	X. ± 0.30
X. ± 2°	X. ± 0.20
.XX ± 1°	.XX ± 0.15
.XXX ± 0.5°	.XXX ± 0.10

CHECKED:

DATE:

PART NO.

FES206-XX XX B01-X

APPROVED:

DATE: