

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.04.20	宋辉

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 500VAC

Contact Resistance: 20m Ω Max.

Operating Temperature: -40°C to +105°C





Materials

Contact Material: Brass Gold Flash /Tin


Insulator Material:Nylon 6T UL 94V-0

Color:Black.

All materials must meet Greenconn
requirement for environment protection

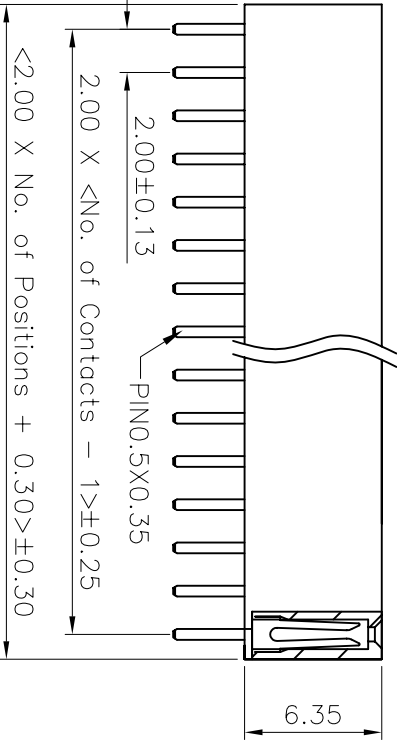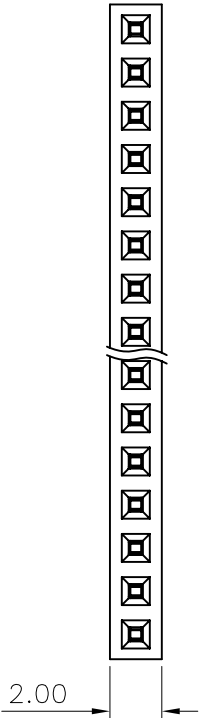

Recommended P.C.B. Layout
(Tolerance:0.05mm)



Ordering Information

FFA113 - XX XX A 01

No. of Pins per Row Contact Plating
02~40 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
Shenzhen Shi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 宋辉

DATE: 2011.04.20

DWG. NO.

FFA113-A01

TITLE.

REV.

01

UNIT.

mm

SCALE.

3:1

PAGE.

1/1



.XX $\pm$ 5.0°

.XX $\pm$ 3.0°

.XX $\pm$ 2.0°

.XXX $\pm$ 1.0°

CHECKED:

AUDITED:

APPROVED:

DATE:

DATE:

DATE:

PART NO.

FFA113-XX XX A01

2.00 FEMALE HEADER
SINGLE ROWS DIP TYPE