

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.04.20	宋辉

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500VAC

Contact Resistance: 20mΩ Max.

Operating Temperature:−40°C to +105°C





Materials

Contact Material: Brass Gold Flash /Tin


Insulator Material:Nylon 6T UL 94V−0

Color:Black.

All materials must meet Greenconn
requirement for environment protection

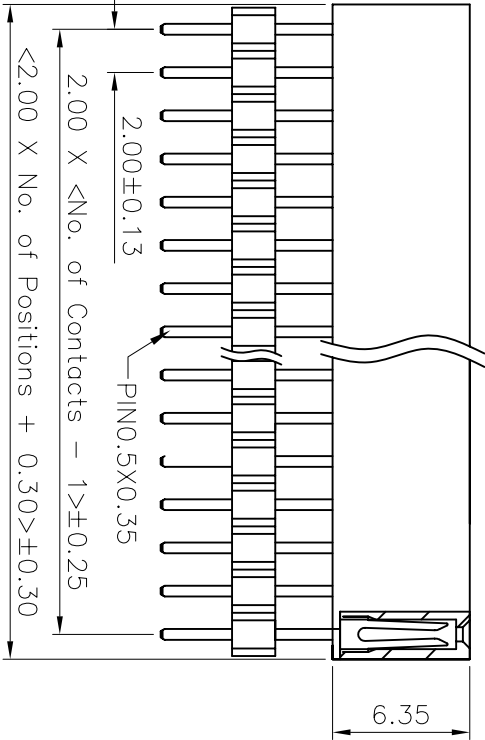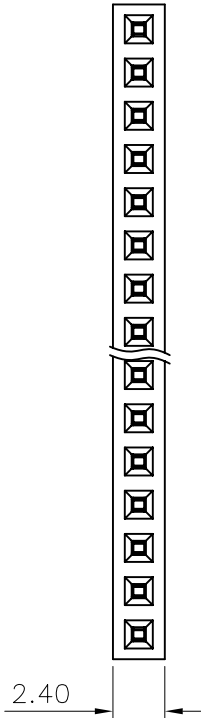

Recommended P.C.B. Layout
(Tolerance:0.05mm)



Ordering Information

FFA113 - XX XX A 01

No. of Pins per Row Contact Plating
02~40 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...



深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

X. ± 5.0°	X. ± 0.30
.X° ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

DESIGN: 宋辉

DATE: 2011.04.20

DWG. NO.

FFA123-A01

TITLE.

2.00 FEMALE HEADER
SINGLE ROWS DIP TYPE

CHECKED:

DATE:

PART NO.

FFA123-XX XX A01

AUDITED:

DATE:

DATE:

APPROVED:

DATE:

DATE:

REV. 01

UNIT. mm

SCALE. 3:1

PAGE. 1/1

1

2

3

4

5

6

7

8

9