

| REV. | LOCAS. | DESCRIPTION      | DATE       | DRAWN |
|------|--------|------------------|------------|-------|
| 01   |        | INITIAL RELEASE. | 2007.11.20 | 张 荣   |

Specifications






Current Rating: 2Amp  
Insulation Resistance: 1000MΩ Min.  
Dielectric Withstanding: 500V AC/DC  
Contact Resistance: 20mΩ Max.  
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze  
Insulation Material: Polyester,UL 94V-0  
Nylon 6T

All materials must be GP materials

RECOMMENDED P.C.B HOLE LAYOUT  
(Tolerance:±0.05)

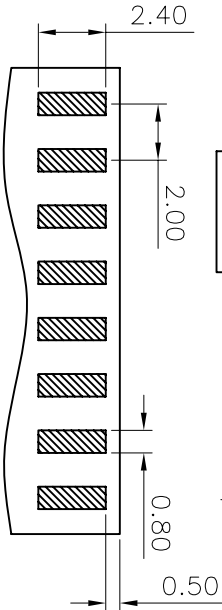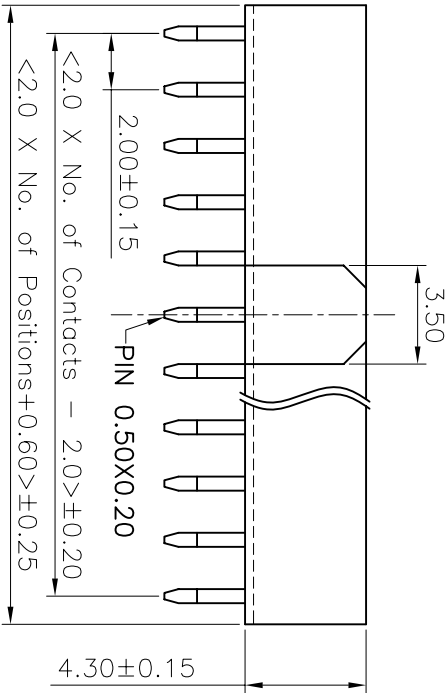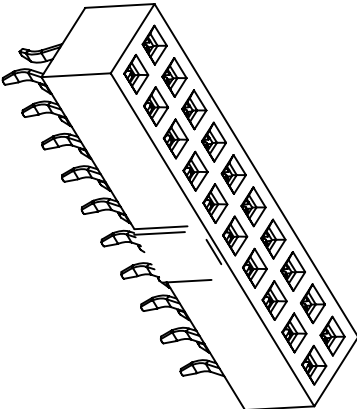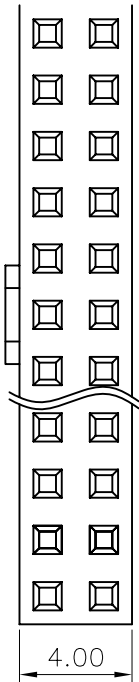

Ordering Information

FFA201 - XX XX A 01 - 1

No. of Pins per Row Contact Plating  
01=Tin  
02=Gold Flash  
Duplex plating  
05=Gold Flash /Tin  
...



深圳市硕康达科技有限公司  
ShenzhenShi Sokcorn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张 荣

DATE: 2007.11.21

DWG. NO.

FFA201-A01-1

TITLE.

|              |             |
|--------------|-------------|
| X* ± 5.0°    | X. ± 0.30   |
| .X* ± 3.0°   | .X ± 0.25   |
| .XX* ± 2.0°  | .XX ± 0.15  |
| .XXX* ± 1.0° | .XXX ± 0.10 |

CHECKED:

DATE:

AUDITED:

DATE:

PART NO.

FFA201-XX XX A01-1

2.00 FEMALE HEADER  
DUAL ROWS DIP TYPE  
BASE 4.30H

REV.

01 UNIT.  
mm

SCALE.

5:1

PAGE.

1/1

