

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.20	尹 晖


Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
Nylon 6T

All materials must be GP materials






RECOMMENDED P.C.B HOLE LAYOUT
(Tolerance: ±0.05)

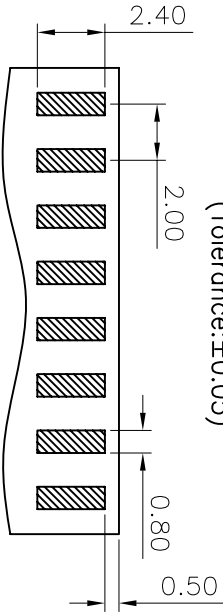

Ordering Information

FFA201 - XX XX A 04

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

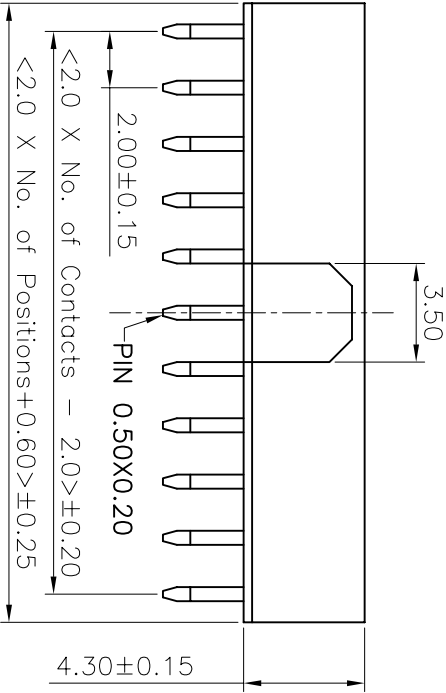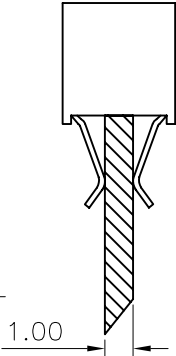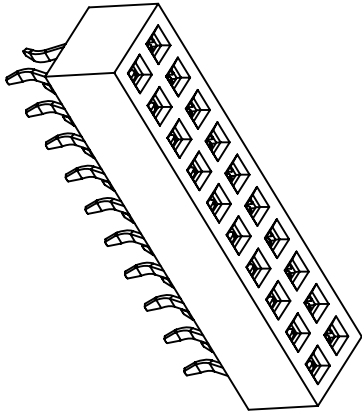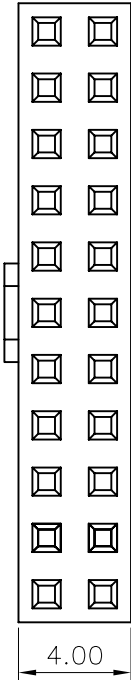

深圳市硕康达科技有限公司
ShenzhenShi Sokcomm Technology Co., Ltd

GENERAL TOLERANCE

X* ± 5.0°	X. ± 0.30
X* ± 3.0°	X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN: 尹 晖 DATE: 2007.11.21

CHECKED: DATE:

AUDITED: DATE:

APPROVED: DATE:

DWG. NO.

FFA201-A04

TITLE.

2.00 FEMALE HEADER
DUAL ROWS DIP TYPE
BASE 4.30H

REV.

01 UNIT.
mm

SCALE.

5:1

PAGE.

1/1



A

B

C

D

E

F