



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.08.02	李春桥



Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
NYLON-6T

All materials must be ROHS materials



RECOMMENDED P.C.B LAYOUT

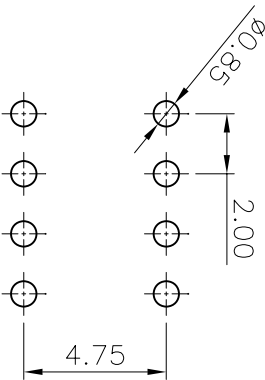

Ordering Information

FFB205 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash/Tin
...

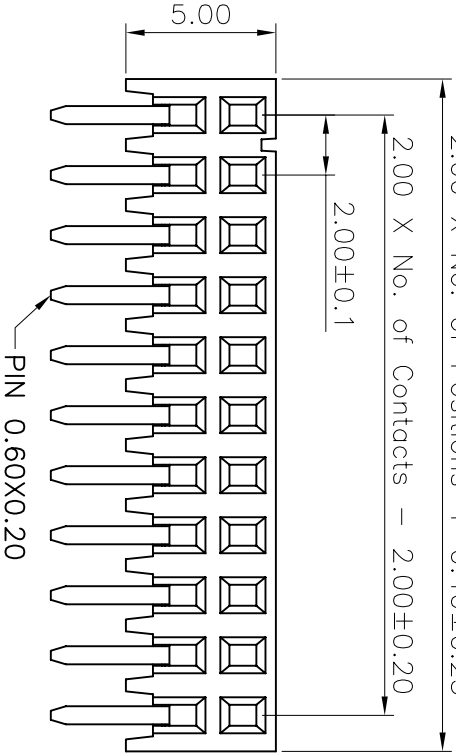

深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	

GENERAL TOLERANCE			
X ± 5°	X ± 0.30		
X ± 2°	X ± 0.20		
XX ± 1°	XX ± 0.15		
.XXX ± 0.5°	.XXX ± 0.10		

DESIGN:	李春桥	DATE:	2007.08.02
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	FFB205-A01
PART NO.	FFB205-XX XX A 01

TITLE.	2.00 FEMALE HEADER DUAL ROWS R/A TYPE SIDE ENTRY
--------	--