


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.20	张 荣

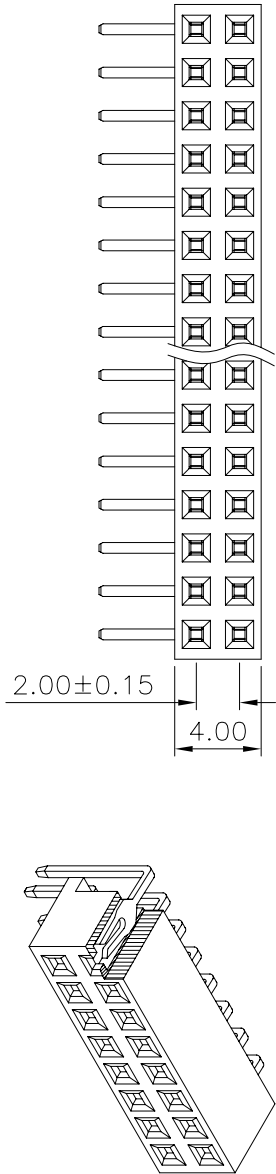

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500VAC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass

Insulator Material: Nylon 6T UL 94V-0

Color: Black.

All materials must meet Greenconn requirement for environment protection

Recommended P.C.B. Layout
(Tolerance: 0.05mm)

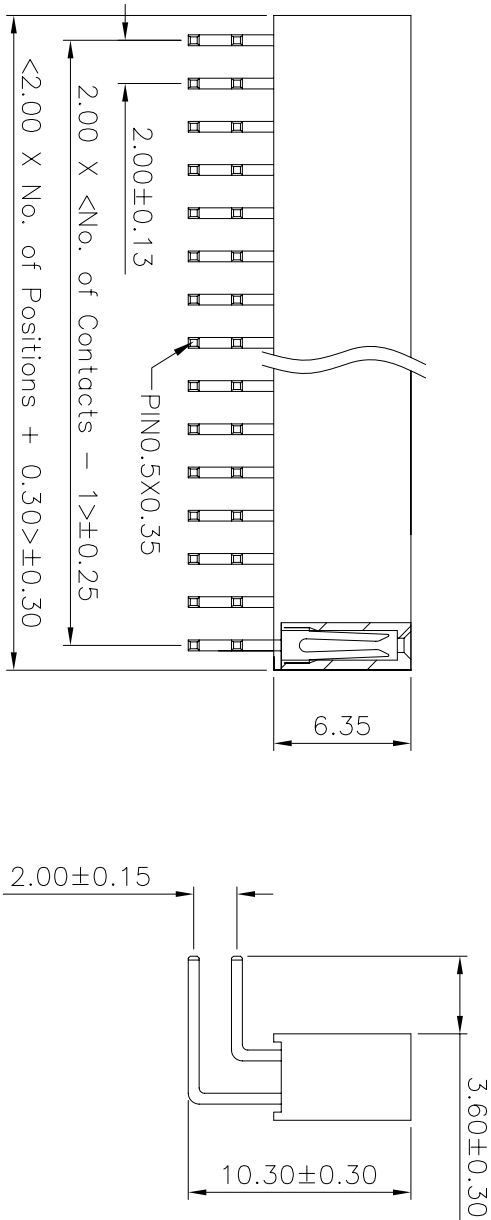

Ordering Information

FFB213 - XX XX A 01

- No. of Pins per Row
02-40
- Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康电子有限公司 Shenzhen Sokconn Electron Co., Ltd				GENERAL TOLERANCE		DESIGN: 张 荣	DATE: 2007.11.21	DWG. NO. FFB213-A01	TITLE. 2.00 FEMALE HEADER DUAL ROWS R/A TYPE
REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1		X. ± 5.0°	X. ± 0.30	CHECKED:	DATE:	PART NO. FFB213-XX XX A01
					X. ± 3.0°	X. ± 0.25	AUDITED:	DATE:	
					.XX ± 2.0°	.XX ± 0.15	APPROVED:	DATE:	
					.XXX ± 1.0°	.XXX ± 0.10			