
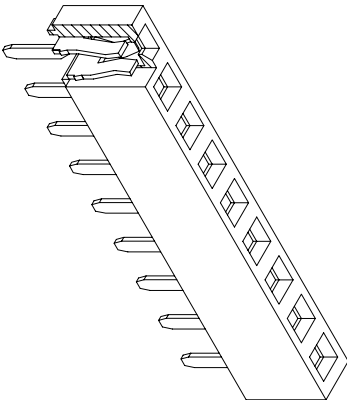


REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.20	李春桥



Specifications
Current Rating: 2Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 500V AC/DC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze

Insulation Material: Polyester,UL 94V-0

Nylon 6T

All materials must be GP materials

RECOMMENDED P.C.B HOLE LAYOUT
(Tolerance: ± 0.05)


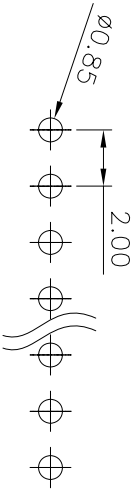


Ordering Information


FFD101 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash

Duplex plating
05=Gold Flash /Tin
...

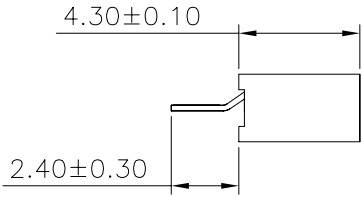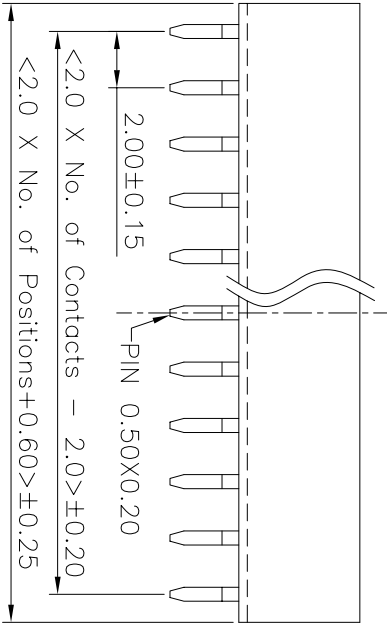

GENERAL TOLERANCE				DESIGN: 李春桥		DATE: 2007.11.21		DWG. NO. FFD101-A01		TITLE. 2.00 FEMALE HEADER DUAL ROWS DIP TYPE BASE 4.30H	
X° $\pm$ 5.0°	X.	$\pm$ 0.30	CHECKED:	DATE:							
X° $\pm$ 3.0°	.X	$\pm$ 0.25	AUDITED:	DATE:							
.XX° $\pm$ 2.0°	.XX	$\pm$ 0.15	APPROVED:	DATE:							
.XXX° $\pm$ 1.0°	.XXX	$\pm$ 0.10									



深圳市硕康达科技有限公司
ShenZhenShi Sokcom Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	