


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.05.17	尹 晖


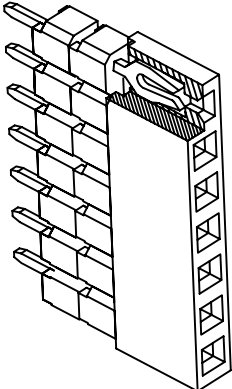


Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -65°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T UL94V-0,


All materials must be rohs materials

Recommended P.C.B. Layout
Tolerance: ±0.05mm

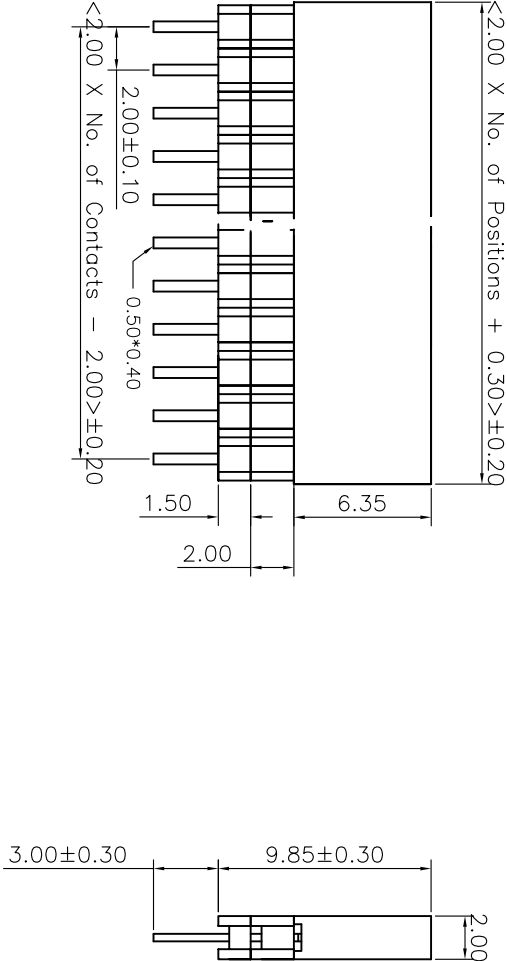

Ordering Information

FFD113 - XX XX A 03
No. of Pins per Row Contact Plating
02~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

深圳市硕康达科技有限公司 ShenzhenShi Sokcom Technology Co., Ltd					GENERAL TOLERANCE			DESIGN: 尹 晖	DATE: 2012.05.17	DWG. NO. FFD113-A03	TITLE. 2.00 FEMALE HEADER SINGLE ROWS DIP TYPE
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1		X. ± 5.0"	X. ± 0.30	CHECKED:	DATE:			
					X. ± 3.0"	X. ± 0.25	AUDITED:	DATE:			
					.XX ± 2.0"	.XX ± 0.15	APPROVED:	DATE:			
					.XXX ± 1.0"	.XXX ± 0.10					
					PART NO. FFD113-XX XX A03						