

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.05.17	尹 晖

Specifications





Current Rating: 2Amp
Insulation Resistance: 1000M Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20m Max.
Operating Temperature: -65°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulator Material: Nylon 6T UL94V-0,

All materials must be ROHS materials

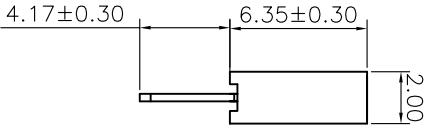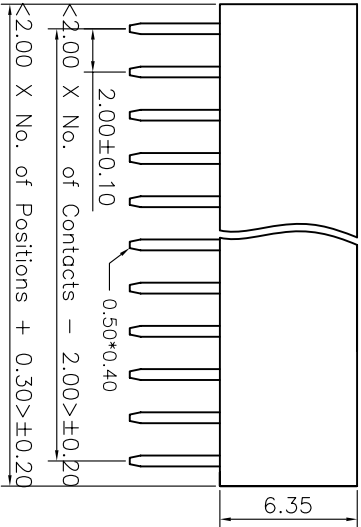

Recommended P.C.B. Layout
Tolerance:±0.05mm

Ordering Information

FFD113 - XX XX A 04

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenzhenShi Sokcom Technology Co., Ltd						GENERAL TOLERANCE		DESIGN:	尹 晖	DATE:	2012.05.17	DWG. NO.	FFD113-A04	TITLE: 2.00 FEMALE HEADER SINGLE ROWS DIP TYPE		
REV.	01	UNIT.	mm	SCALE.	1:1	PAGE.	1/1		X* ± 5.0"	X. ± 0.30	CHECKED:		DATE:			PART NO.
									.X* ± 3.0"	.X ± 0.25	AUDITED:		DATE:			
									.XX* ± 2.0"	.XX ± 0.15	APPROVED:		DATE:			
									.XXX ± 1.0"	.XXX ± 0.10						

A

B

C

D

E

F

A

B

C

D

E

F