



312102161863

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.04.14	李春桥



Specifications
Current Rating: 2Amp
Insulation Resistance: 100MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -65°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T UL94V-0,
All materials must be ROHS materials



Recommended P.C.B. Layout
Tolerance: ±0.05mm



Ordering Information

FFD113 - XX XX A 05

No. of Pins per Row Contact Plating
01=TiN
02=Gold Flash
Duplex plating
05=Gold Flash /TiN
...

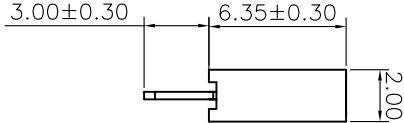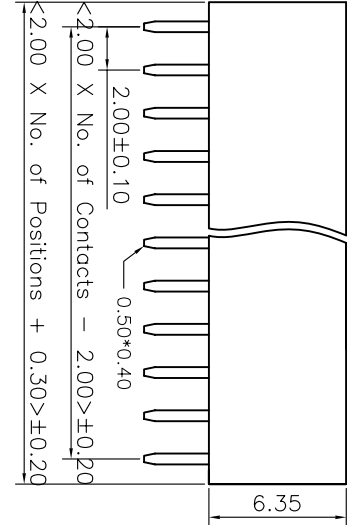

深圳市硕康达科技有限公司
ShenzhenShi Sokcomn Technology Co., Ltd

GENERAL TOLERANCE

X* ± 5.0"	X. ± 0.30
X* ± 3.0"	X. ± 0.25
.XX* ± 2.0"	.XX ± 0.15
.XXX* ± 1.0"	.XXX ± 0.10

DESIGN: 李春桥

DATE: 2014.04.14

DWG. NO.

FFD113-A05

TITLE:

2.00 FEMALE HEADER
SINGLE ROWS DIP TYPE

A

B

C

D

E

F

A

B

C

D

E

F