


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.05.17	尹 晖

Specifications



Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -65°C to +105°C

Materials


Contact Material: Phosphor Bronze

Insulator Material: Nylon 6T UL94V-0,

All materials must be GP materials

Recommended P.C.B. Layout



Tolerance: ±0.05mm



Ordering Information

FFD150 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

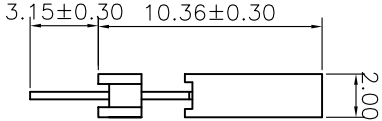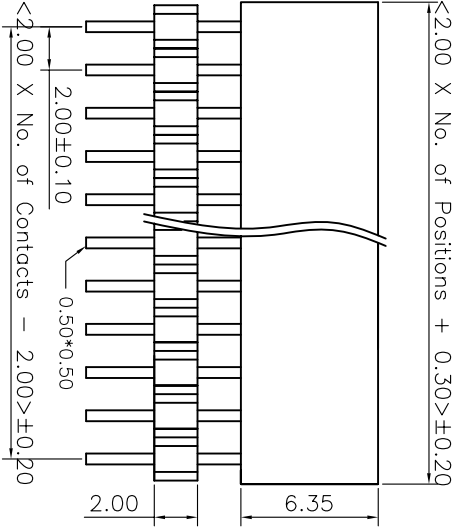

深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN:

尹 晖

DATE: 2012.05.17

DWG. NO.

FFD150-A01

TITLE:

2.00 FEMALE HEADER
SINGLE ROWS DIP TYPE

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

X* ± 5.0°	X. ± 0.30
X* ± 3.0°	X. ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

CHECKED:

AUDITED:

DATE:

PART NO.

FFD150-XX XX A01

A

B

C

D

E

F