


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.08.29	尹 晖

Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -65°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T UL94V-0,

All materials must be GP materials



Recommended P.C.B. Layout
Tolerance: ±0.05mm



Ordering Information

FFD150 - XX XX A 02

No. of Pins per Row Contact Plating
02~40 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

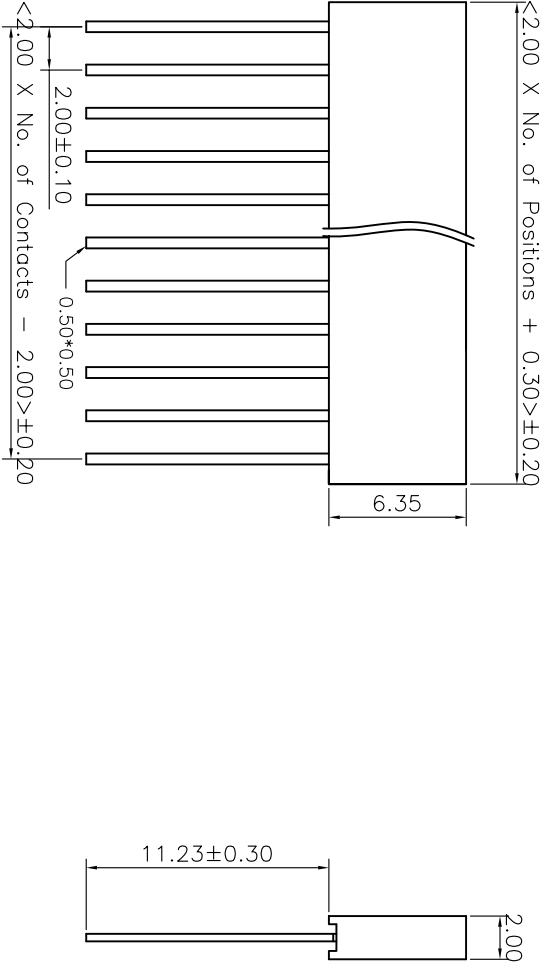

REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1		 深圳市硕康达科技有限公司 ShenZhenShi Sokcomm Technology Co., Ltd	GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2012.08.29	DWG. NO.	TITLE.
										FFD150-A02	
								CHECKED:	DATE:		
								AUDITED:	DATE:	PART NO.	2.00 FEMALE HEADER SINGLE ROWS DIP TYPE
						.XXX ± 1.0°	.XXX ± 0.10	APPROVED:	DATE:	FFD150-XX XX A02	