


REV.	LOOQS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.20	张 荣


RECOMMENDED P.C.B HOLE LAYOUT
(Tolerance:±0.05)

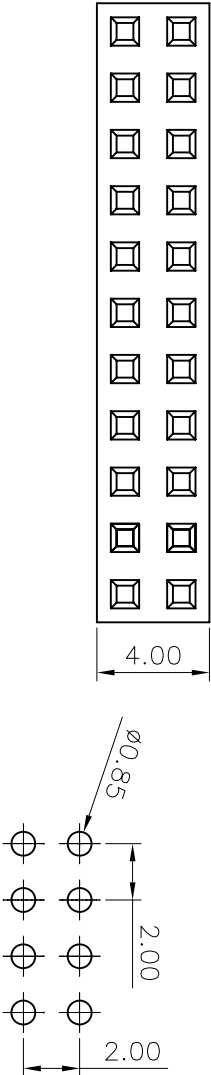

Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
Nylon 6T
All materials must be GP materials

Ordering Information

FFD201 - XX XX A 01 - X
No. of Pins per Row Contact Plating
02~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=cap
T=tape reel
C=acetate tape
PT=cap+tape reel

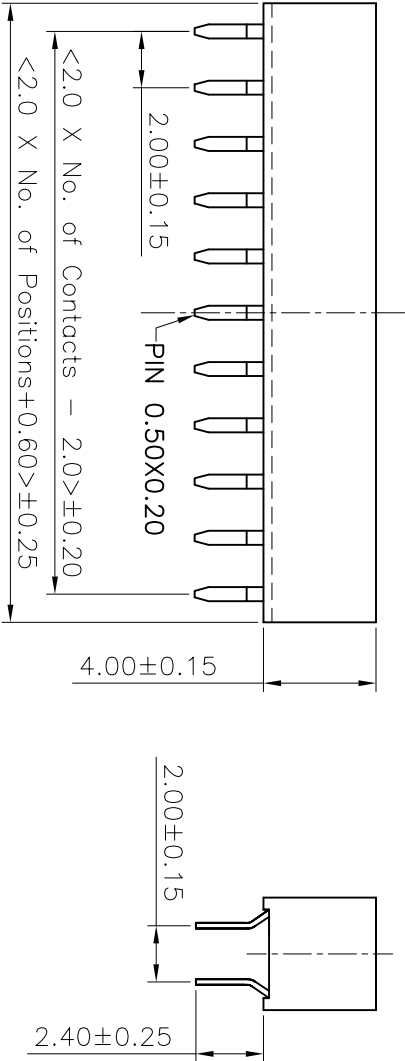

 深圳市硕康达科技有限公司 ShenzhenSri Sokcomm Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 张 荣		DATE: 2007.11.21		DWG. NO.		TITLE.	
		X. ± 5.0"	X. ± 0.30		CHECKED:		DATE:		FFD201-A01		2.00 FEMALE HEADER DUAL ROWS DIP TYPE BASE 4.00H		
		.X ± 3.0"	.X ± 0.25		AUDITED:		DATE:		PART NO.				
		.XX ± 2.0"	.XX ± 0.15		APPROVED:		DATE:		FFD201-XX XX A01-X				
REV.	01	UNIT.	mm	SCALE.	5:1	PAGE.	1/1						