





REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.10.12	邓亮

RECOMMENDED P.C.B LAYOUT
FOR TOP ENTRY
(Tolerance:±0.05)

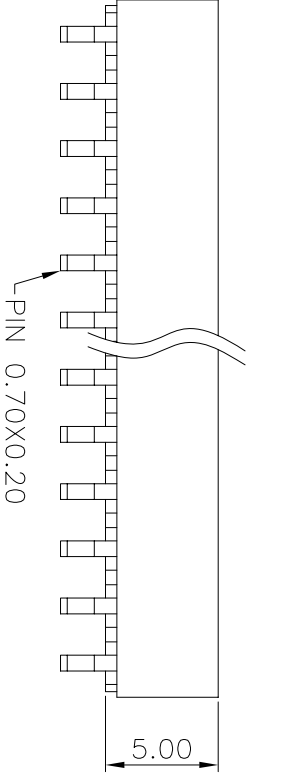

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V−0 PA46
All materials must be GP materials

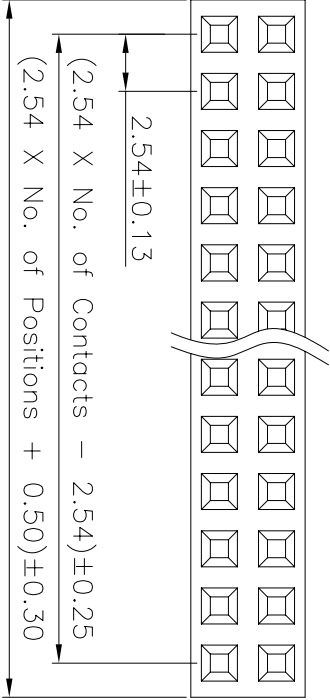

Ordering Information

FHS206 − XX XX A 02
No. of Pins per Row Contact Plating
02~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenZhenShi Sokcom Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 邓亮	DATE: 2008.10.12	DWG. NO. FHA206−A02	TITLE: 2.54 FEMALE HEADER DUAL ROWS SMT TYPE BASE 5.00H
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1		X.° ± 5.0° .X° ± 3.0° .XX° ± 2.0° .XXX ± 1.0°	X. ± 0.30 .X ± 0.25 .XX ± 0.15 .XXX ± 0.10	CHECKED: AUDITED: APPROVED: DATE: DATE: DATE:	PART NO. FHA206−XX XX A02	