


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.10	邓亮

Specifications


Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze.
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

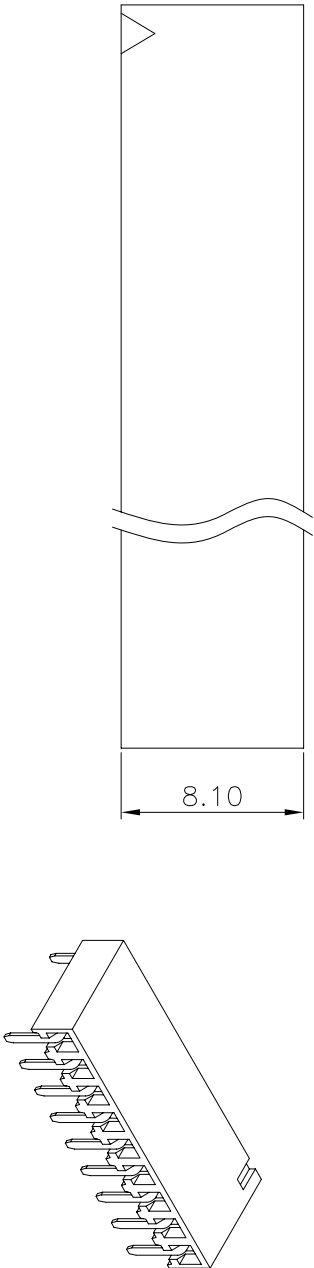

Recommended P.C.Board
Hole Layout




Ordering Information

FHB101 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash

Duplex plating
05=Gold Flash /Tin
18=15u"Gold on the contact
1u"Gold on the tail
...

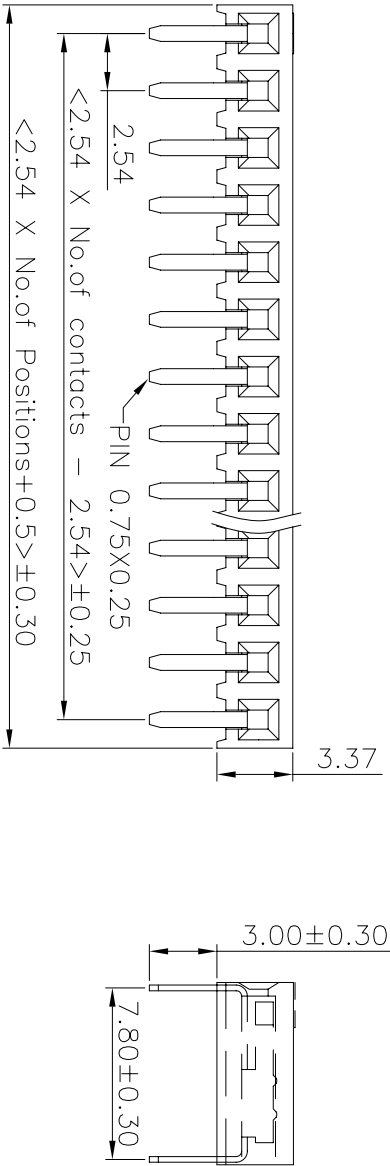

Sokcom 深圳市硕康达科技有限公司 ShenZhenShi Sokcom Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 邓亮	DATE: 2007.10.10	DWG. NO.	TITLE.	
				X. ± 5.0°	X. ± 0.30	CHECKED:	DATE:	FHB101-A01	2.54 FEMALE HEADER	
				.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	PART NO.	SINGLE ROW R/A TYPE	
				.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:	FHB101-XX XX A01	BASE 3.37H	
				.XXX ± 1.0°	.XXX ± 0.10					
REV.	01	UNIT.	mm	SCALE.	1:1	PAGE.	1/1			