



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2010.05.18	邓亮

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

Recommended P.C.B. Layout
(Tolerance: ±0.05)

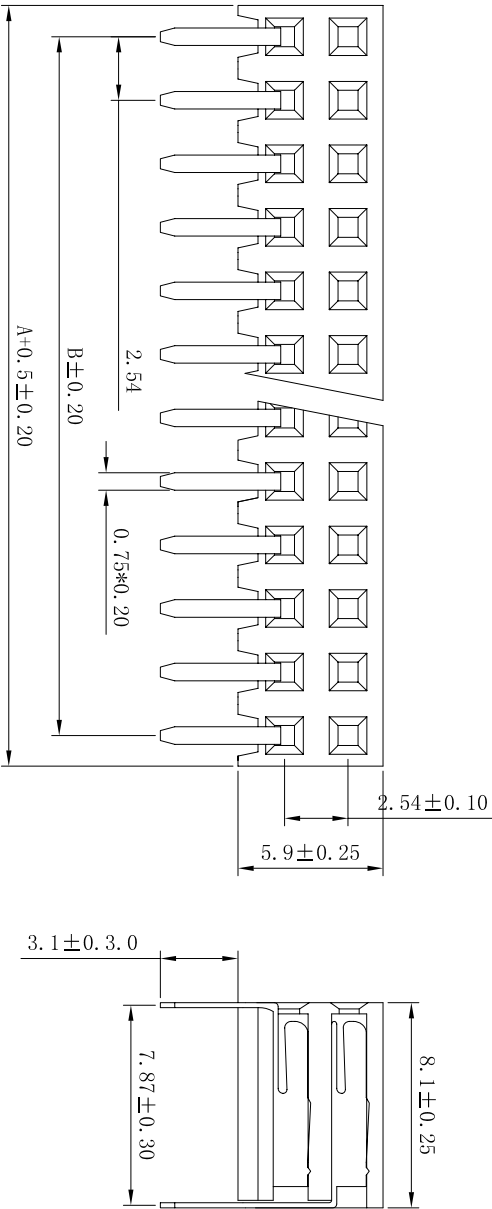

Ordering Information

FHB110 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenzhenShi Sokcom Technology Co., Ltd					GENERAL TOLERANCE		DESIGN: 邓亮	DATE: 2010.05.18	DWG. NO. FHB210-A01	TITLE. 2.54 FEMALE HEADER DUAL ROWS DIP TYPE SIDE ENTRY
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1		X.° ± 5.0°	X. ± 0.30	CHECKED:	DATE:	PART NO. FHB210-XX XX A01	
					.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:		
					.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:		
					.XXX° ± 1.0°	.XXX ± 0.10				