

REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.10	? ?

Specifications


Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze.
Insulation Material: Polyester, UL 94V-0

Nylon 6T

All materials must be GP materials

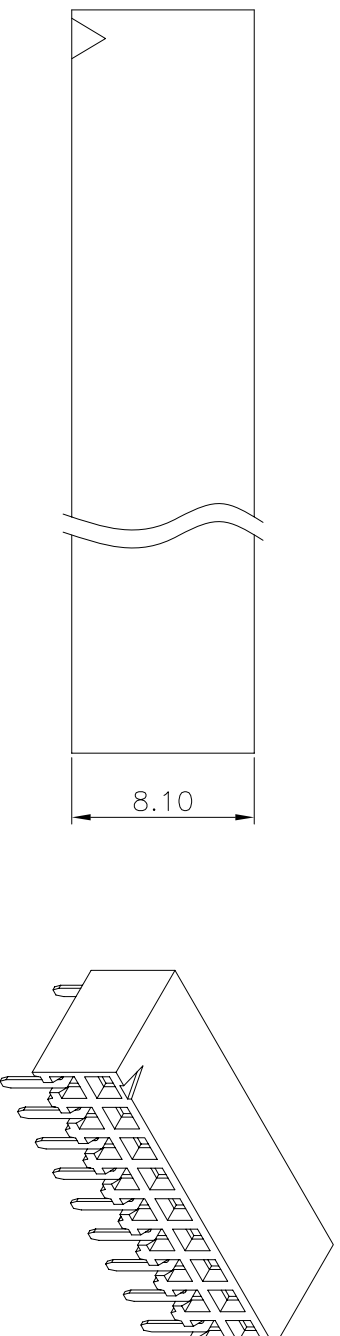

Recommended P.C.Board
Hole Layout

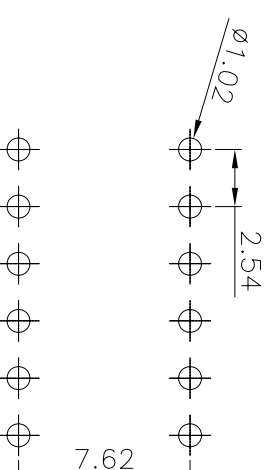


Ordering Information

FHB211 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash

Duplex plating
05=Gold Flash /Tin

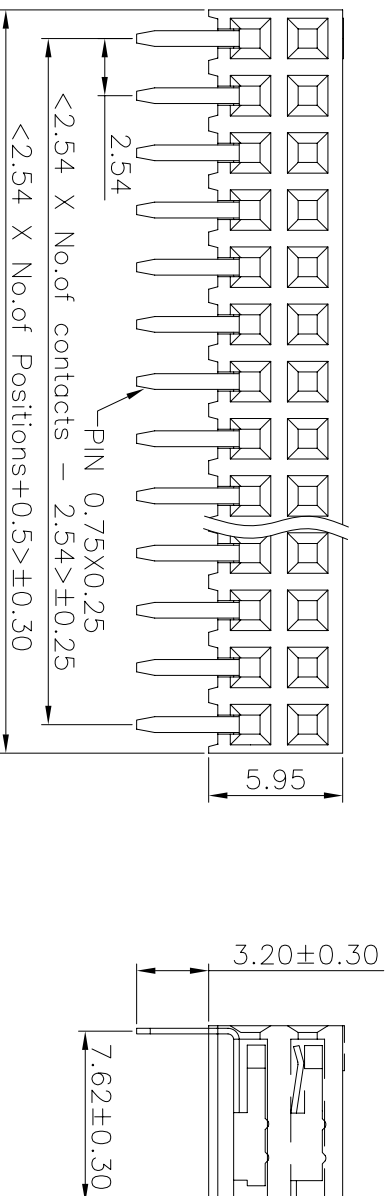

深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: ? ?

DATE: 2007.10.10

DWG. NO.

FHB211-A01

TITLE.

2.54 FEMALE HEADER

DUAL ROWS R/A TYPE

BASE 5.95H

X.* ± 5.0°	X.	± 0.30
X.* ± 3.0°	X	± 0.25
.XX* ± 2.0°	.XX	± 0.15
.XXX* ± 1.0°	.XXX	± 0.10

CHECKED:
AUDITED:
APPROVED:

DATE:
DATE:
DATE:

PART NO.
FHB211-XX XX A01

REV. 01

UNIT. mm
SCALE. 1:1
PAGE. 1/1