



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.10	尹晖



Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass/Gold/Tin


Insulation Material: Polyester, UL 94V-0

Nylon 6T

All materials must be ROHS materials

Recommended P.C.Board

Hole Layout

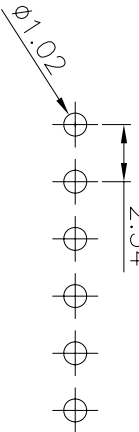

Ordering Information

FHD107 - XX XX A 01

No. of Pins per Row Contact Plating



01=Tin

02=Gold Flash

Duplex plating

05=Gold Flash /Tin

...

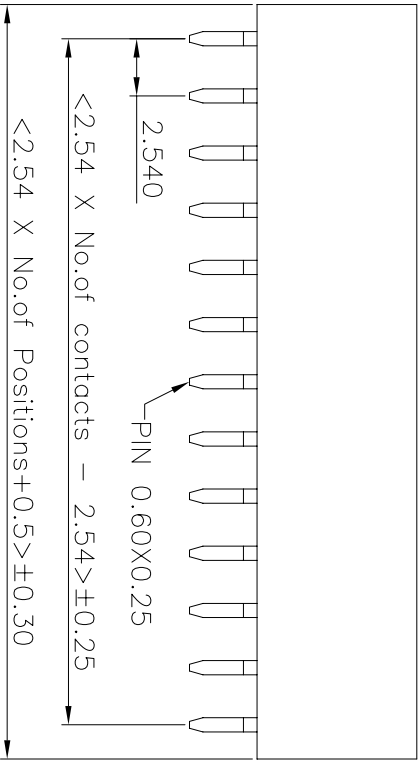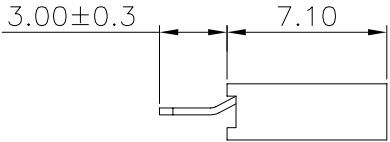

深圳市硕康达科技有限公司

ShenzhenShi Sokcomm Technology Co., Ltd

GENERAL TOLERANCE

DESIGN:

李春桥

DATE: 2013.06.20

DWG. NO.

FHD107-A01

TITLE:

2.54 FEMALE HEADER

SINGLE ROW DIP TYPE

BASE 7.10H

X. ± 5.0°

X. ± 0.30

CHECKED:

DATE:

PART NO.

.X° ± 3.0°

.X ± 0.25

AUDITED:

DATE:

.XX° ± 2.0°

.XX ± 0.15

APPROVED:

DATE:

.XXX ± 1.0°

.XXX ± 0.10

A

B

C

D

E

F

A

B

C

D

E

F