





REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.03.23	尹 晖

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

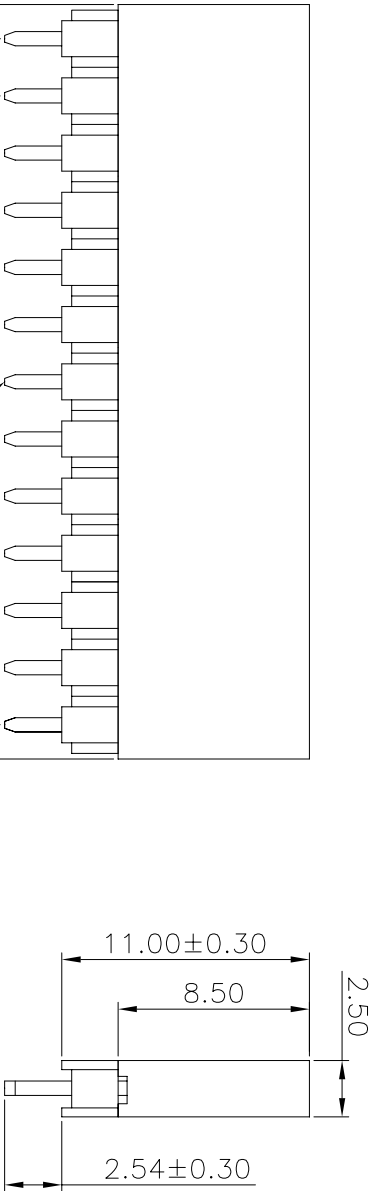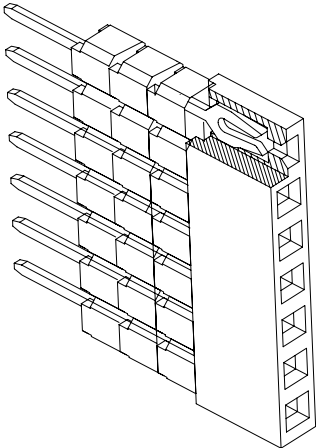

Recommended P.C.Board

Hole Layout

Ordering Information

FHD164 - XX XX A 01

No. of Pins per Row Contact Plating
02~40 01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

...

 深圳市硕康达科技有限公司 ShenzhenShi Sokconn Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2012.03.23	DWG. NO.	TITLE.
				X. ± 5.0°	X. ± 0.30	CHECKED:	DATE:	FHD164-A01	2.54 FEMALE HEADER
				.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	PART NO.	SINGLE ROWS DIP TYPE
				.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:	FHD164-XX XX A01	BASE 11.00H
				.XXX ± 1.0°	.XXX ± 0.10				
REV.	01	UNIT.	mm	SCALE.	1:1	PAGE.	1/1		

