

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.10.10	尹 晖

Specifications


Current Rating: 3Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze.
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

Recommended P.C.Board

Hole Layout




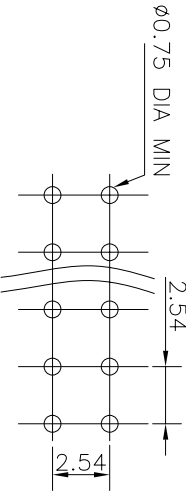


Ordering Information

FHD235 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

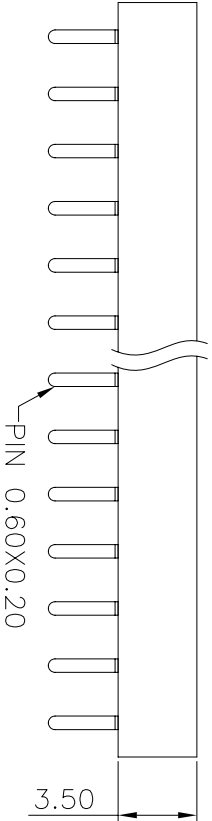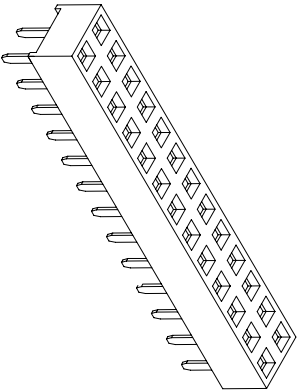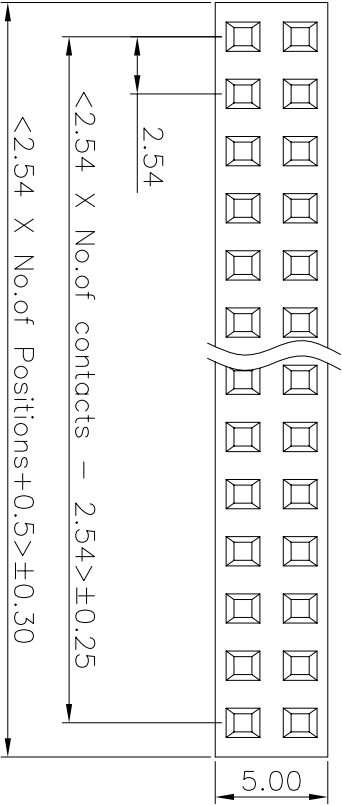

深圳市硕康达科技有限公司
Shenzhen Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2007.10.10

DWG. NO.

FHD235-A01

TITLE:

2.54 FEMALE HEADER
DUAL ROWS DIP TYPE
BASE 3.50H

X. ± 5.0° X. ± 0.30
.X° ± 3.0° .X ± 0.25
.XX° ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:
AUDITED:
APPROVED:

DATE:
DATE:
DATE:

PART NO.
FHD235-XX XX A01-X

REV. 01

UNIT. mm

SCALE. 1:1

PAGE. 1/1

